

1                   **DESIGN AND IMPLEMENTATION OF A SHARED AUTONOMOUS VEHICLE**  
2                   **SYSTEM IN AUSTIN, TEXAS**

3  
4                   Marc Segal  
5                   ATKINS Global  
6                   6504 Bridge Point Parkway, Suite 200  
7                   Austin, TX 78750  
8                   msegal@utexas.edu  
9                   Phone: (856)-912-2682

10  
11                   Kara M. Kockelman  
12                   (Corresponding Author)  
13                   E.P. Schoch Professor in Engineering  
14                   Department of Civil, Architectural and Environmental Engineering  
15                   The University of Texas at Austin  
16                   6.9 E. Cockrell Jr. Hall  
17                   Austin, TX 78712-1076  
18                   kkockelm@mail.utexas.edu  
19                   Phone: (512) 471-0210

20  
21                   Under review for publication in the *Journal of Urban Planning and Development*    *pril*

22  
23  
24  
25                   **ABSTRACT**

26                   Autonomous vehicles (AVs) and shared autonomous vehicles (SAVs) have the potential to  
27                   significantly change society’s transportation systems and land-use patterns, thereby impacting  
28                   the quality of life for urban dwellers. A shift to self-driven cars affects what people do in their  
29                   vehicles, their values of travel time, road safety, traffic congestion, and the natural environment.  
30                   Cities and other government agencies will have the opportunity to integrate SAV technologies  
31                   systemically within roadway networks to further promote these concepts, as well as to provide  
32                   low-cost transit options, further propagating the benefits.

33  
34                   The assumptions enabling this forward thinking will provide initial insight into AV technology  
35                   and their application within the Austin network. The station and queuing geometry utilizes  
36                   context sensitive design, promoting multi-modal access. This insight into SAV dynamic  
37                   ridesharing (DRS) systems enables potential initial integration of this technology, given the  
38                   benefits logistically of fleet systems. Different station locations are examined, (and can serve as a  
39                   template for other special trip generators in cities across the globe) serving different areas of the  
40                   metropolitan region, and providing a differing level of service to the users of the Austin transit  
41                   system. This culminated in the decision of electric cars providing service to four regionally  
42                   distributed station systems, generating a benefit-to-cost (B/C) ratio of 4.42.

43  
44                   **Key Words:** Shared autonomous vehicles, autonomous taxi system design, electric vehicles,  
45                   dynamic ride-sharing

1 **INTRODUCTION**

2 Implementation of shared, self-driving vehicles may completely alter society’s experience of  
3 transit. One socially-equitable implementation of fully-autonomous self-driving vehicles (AVs)  
4 is a shared (SAV) fleet system, which will provide sustainable and cost-effective transit for  
5 communities. The ability to allow for expanded mobility and environmental benefits was part of  
6 the impetus to provide a forward-looking perspective into the geometrical renderings of this  
7 future transit option. Dynamic ride sharing (DRS) is the use of chained trips, which will allow  
8 for varied level of service depending upon patron preferences, providing an increased system  
9 capacity while rewarding patrons for ride sharing.

10  
11 The designs developed here integrate a DRS-SAV fleet into the Austin, Texas setting with the  
12 assumption that fully operable SAV technology is market-ready. The fleet system builds upon  
13 Kornhauser’s (2013) DRS-SAV simulations in New Jersey, which contained hub centers where  
14 SAVs would function to serve patrons. Jorge and Correia’s (2013) notion of one-way transit  
15 options bolstered the idea of the ride-sharing program. Ride-sharing, which has its benefits if  
16 implemented in more mass, led to a 40% reduction in cumulative trip length if ridesharing had  
17 more systematic influence (Resta, Santi et al 2014). Additionally, DRS outperforms non-  
18 ridesharing systems in multiple performance measures, including environmental (Zhang and  
19 Guhatharkurta 2015). These four different station locations (explained schematically later in this  
20 paper), provide service to special trip generators, along with door-to-door service. Benefits from  
21 promoting transit systems, ride-sharing, reduction of individual car-ownership, and the enhanced  
22 safety of these vehicles allow the City of Austin to grow within the existing roadway  
23 infrastructure. Each AV is assumed to replace 14 traditional vehicles from the network (Zhang  
24 and Guhathakurta 2015). This proposal provides an insight into the future of transit systems  
25 within the urban setting, paving the way for cities to implement this type of technology. With a  
26 base fee of a dollar per person and a dollar for each mile traveled, the transit system rivals  
27 comparable alternatives as displayed in Table 1.

28  
29 **Table 1. Cost Comparison for Similar Transportation Alternatives in Austin**

30

| User Cost of Different Shared Vehicle Systems from Austin Bergstrom Airport to Downtown’s Seaholm Station Area (11.2 miles) |      |
|---|------|
| Uber  | \$26 |
| Lyft  | \$33 |
| Car2Go  | \$14 |
| Yellow Cab  | \$31 |
| Proposed SAV System   | \$13 |

31  
32 **FRAMEWORK FOR THE TRANSIT SYSTEM**

33 An AV is defined as a car that can “perceive its environment, decide what route to take to its  
34 destination, and drive it” (Yeomans 2014). There are different levels of autonomy, varying by  
35 the amount of driver assistance needed to operate the car. Current market technology includes  
36 adaptive cruise control, self-parking capabilities, and “pilot-assist” technology for congested


1 conditions (Kessler et al 2015). This assumption of market-ready level 4 technology is used here  
2 for design and system functionality, which is critical for determining how the car operates within  
3 the roadway network and the role of those inside.

4  
5 At the fully-autonomous stage, the car would be able to navigate itself in known and unknown  
6 situations. Vehicle control systems that automatically brake and accelerate provide much more  
7 efficient reaction times than an average driver (Preliminary Statement of Policy Concerning  
8 Automated Vehicles). Because of the eventual removal of human decision making on the  
9 roadways, AV technology will have the capabilities to decrease headways between vehicles,  
10 thereby drastically increasing the roadway capacity without having to add additional  
11 infrastructure. According to the Environmental Protection Agency in 2010, the value of life was  
12 estimated at around \$9.1 million (Appelbaum 2011). Every year on the road, 93% of traffic  
13 accidents are due to human mistake, which cause 1.3 million deaths and 50 million injuries  
14 worldwide (Yeomans 2014). Therefore, implementing cars that can fully drive themselves would  
15 have the potential to decrease collision rates and increase human productivity since everyone  
16 sitting in the vehicle will be a passenger capable of performing activities other than driving  
17 (Litman 2015). Many major companies like Mercedes-Benz, GM, and Google have already  
18 developed working AV prototypes. More recently, vehicles already equipped with sensors may  
19 be able to receive software updates to enable level 2 or 3 autonomy, as seen with the recent Tesla  
20 software updates to allow for autonomous features such as autopark, autosteer, auto-lane change,  
21 traffic-aware cruise control, and side collision warning (Teslamotors.com).

22  
23 Currently, autonomous technology, excluding vehicle cost (note that some technology cannot be  
24 retroactively inserted), costs around \$20,000-\$80,000 which is much higher than most travelers  
25 are willing to pay (Litman 2013). Cost, along with the legal system and regulations, are the top  
26 three barriers to autonomous vehicle usage (Southwest Research Institute 2015).

## 27 28 **System Technology Relating to the Network**

29 The outlined boundaries of the Austin network are illustrated in Figure 1, encompassing 90  
30 square miles. The system boundaries were determined by incorporating the most densely  
31 populated areas. This varies from the AV fleet system modeled by Fagnant and Kockelman  
32 (2014), which utilized a 12x 24 mile-bounded network. However, their simulation data serves  
33 here as a base measure for principles of vehicle relocation, person-trips to be served per SAV per  
34 day SAV and daily VMT per SAV. System-wide modeling is not used here, with individual  
35 vehicles loading individual network links and responding to specific customer calls on SAVs.

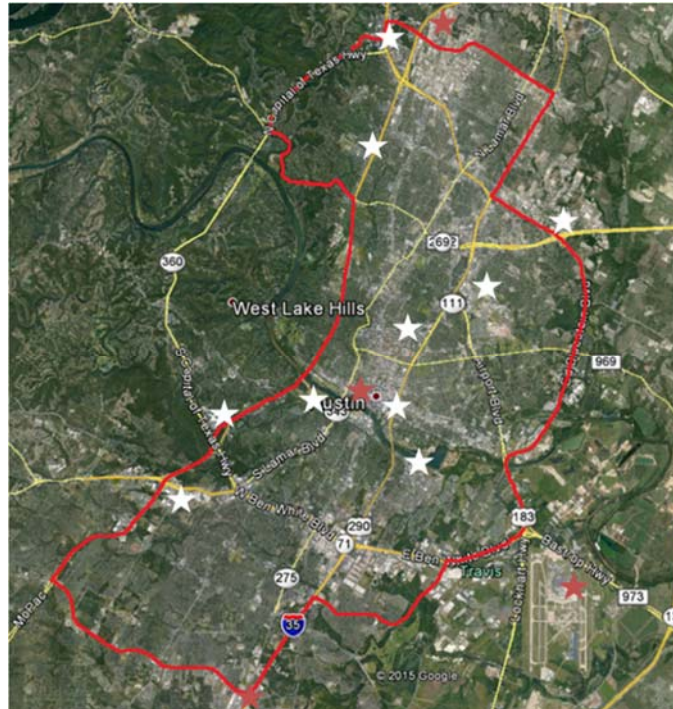

2 **FIGURE 1. Project Limits with Station Locations** (Source: Google Earth)

3  
4 Figure 1 shows all station locations. Station placement was determined through a look at  
5 Austin's top travel corridors, population and jobs density maps, and reasonably equitable  
6 distribution of stations across the region, to help limit vehicle redistribution costs. Figure 1's  
7 red-star locations are top stations, with high demand and high levels of service frequency  
8 expected. These major stations differ from the white-star queuing areas; which are more common  
9 and allow for quicker alighting times at a reduced cost for the system operator. These system  
10 attributes are part of the parameters that would be geo-coded by a fleet operator in order to  
11 determine permissible drop-off areas in high density and high traffic areas. System design and  
12 operations decisions should also account for periods of peak demand (like the morning rush-  
13 hours), when more ride-sharing opportunities will exist. All of the data described above can be  
14 used in system-management software that will function and interact with patrons, similar to any  
15 transportation network company.

## 16 **User Attributes**

17  
18 Understanding the system's users and how they will interact with the team's proposed product  
19 will help provide adequate and desirable amenities. Per assumptions, the basis of charging the  
20 passenger \$1.00 per mile of a non-shared trip (with the potential for that cost to decrease with  
21 sharing), the affordability of the product should not dissuade a significant percentage of travelers  
22 (Fagnant 2015). The DRS-SAV system rivals many other transit systems in the Austin area, as  
23 seen in Table 1, due to the elimination of driver costs. The costs related to this system and factors  
24 of sensitivity related to the variability of the costs of this product will be discussed in further  
25 detail in the cost analysis.

1 Barriers to public participation in this transit alternative are access to smartphones and one's  
2 psychological acceptance to cede control of the vehicle. However, this system can incorporate a  
3 wider array of patrons through personalization and a reflection of this personalization in the cost  
4 of the service. Examples of this personalization can range from the users preferred and maximum  
5 wait times, as well as increased levels of service (e.g., as in the use of tolled express lanes).  
6 Having the user interact with a mobile application will allow for data collection and suggestions  
7 regarding amenities for future stations, and will be helpful in creating shared knowledge and  
8 integration of new technologies.

## 9 **Ridesharing Methodology**

10 A typical ride will consist of the following: a traveler arrives at the station, and his or her  
11 willingness to share the ride will dictate where he or she is placed in the network's service queue.  
12 A third of U.S. ridesharing occurs between the hours of 7-8 AM and 5:30-7:30 PM (Zhang and  
13 Guharkakurta 2015). If a ride request occurs during these peak times of day, increased ride-  
14 sharing or system overuse may occur, which would then mean all rides must be shared, to the  
15 greatest extent possible, to protect fleet seat capacity, and avoid not meeting traveler requests.  
16 Depending upon the time of day and the station, different vehicle relocation strategies as well as  
17 rider-distribution strategies will be utilized. One benefit of self-driving technology is the ability  
18 to provide door-to-door service. The transit system promotes ridesharing with stations in  
19 attractive destinations, but an added door-to-door service charge could be a way to further  
20 promote public-transit-type operations. Door-to-door service will be discouraged in high-density  
21 areas where alighting can be disruptive of traffic flows and/or dangerous to pedestrians. For a  
22 lower charge, patrons can be dropped off in designated areas, such as hotel valet parking areas,  
23 business driveways and hospital drop-off areas. Optimization techniques will reduce total service  
24 time even when additional stops are needed to accommodate more passengers (Fagnant 2015).  
25 Such techniques effectively increase the "true average vehicle occupancy" while minimizing  
26 average user wait times.

27

## 28 **DESIGN OVERVIEW**


29 The proposed designs of these stations are backed by research, standards regarding transit  
30 systems, and an understanding of the amenities needed for the patrons and for the vehicles  
31 themselves. The design of each station has its own uniqueness in capacity, land-use, and  
32 clientele. Each of the four schematic drawings below was constructed using MicroStation and  
33 Google Earth. Figure 2 displays the location of the main station center in the downtown region,  
34 where new mixed-use projects will be attracting permanent residents who may prefer the  
35 freedom associated with not owning a vehicle.



1  
2 **FIGURE 2. DRS-SAV Station at Seaholm Site, Profile View (CBD Mixed-Use Setting)**  
3

4 **DRS-SAV STATION ATTRIBUTES AND LOCATIONS**

5 DRS-SAV station attributes consider the people being served by that station as well as each  
6 station's surroundings. Station locations were determined based on the attractiveness of the  
7 surrounding businesses and relative areas. It is important to understand the surrounding  
8 businesses and land-uses to ensure that proper amenities are provided, such as having enough  
9 pick-up and drop-off spots. For example, many commuters may want to use a high-density area  
10 that is peripheral of the central business district (CBD) (which will serve peak-hour travelers)  
11 and park their vehicle within close proximity of the station. More densely packed areas that can  
12 serve a variety of passengers will need multi-modal access, promoting transit use and reducing  
13 the amount of personally owned vehicles, as well as additional infrastructure to support patrons.  
14 Selected locations will also require charging stations if EVs are pursued, which will be situated  
15 where vehicles are queued for significant time periods or stored overnight. The following four  
16 stations which were selected and evaluated in the project analysis correspond to a housed vehicle  
17 fleet of 400 AVs. This fleet size rivals competitors such as Yellow Cab Austin (461 permits), but  
18 the SAV-DRS system outperforms Yellow Cab Austin with regards to average passengers per  
19 month (342,000 vs. 276,738 respectively) (Derr, 2014).

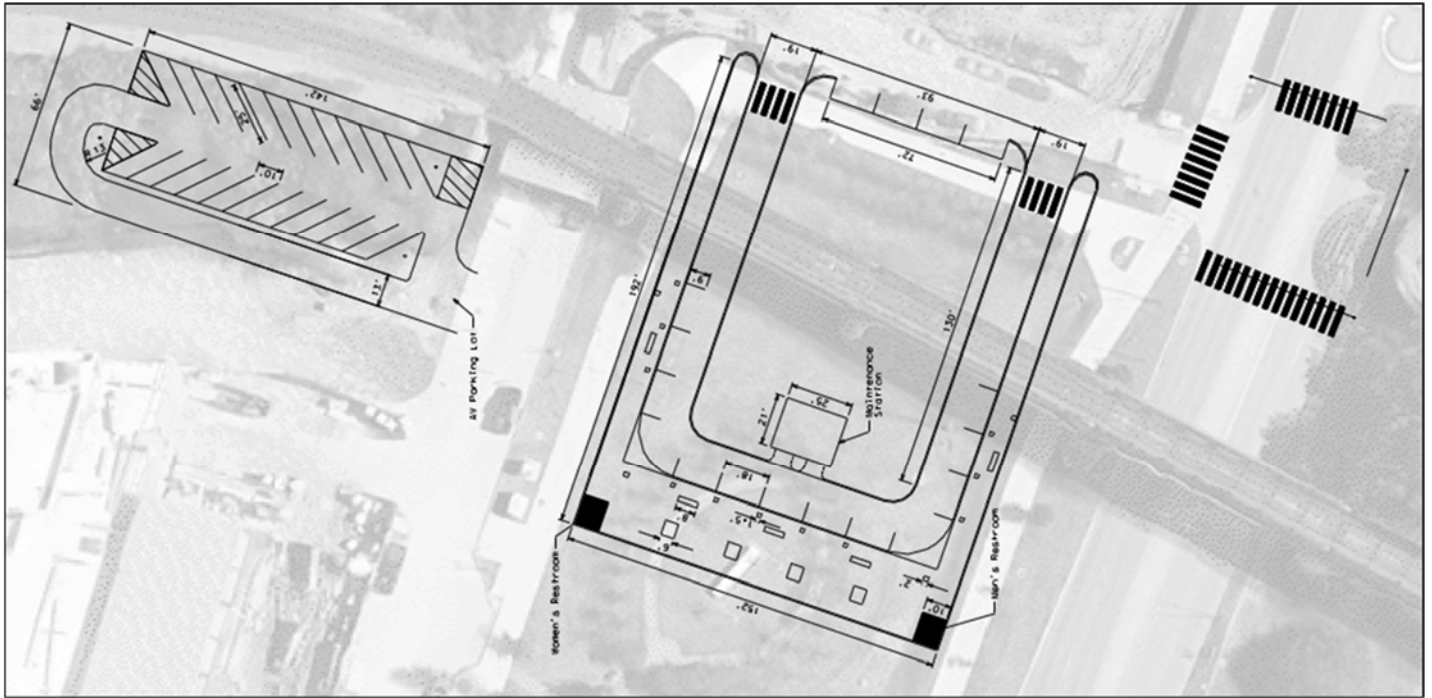

1  
 2 **FIGURE 3. DRS-SAV Station Design at Seaholm Site, Plan View (CBD Mixed-Use Setting)**

3  
 4 **CBD Mixed-Use Design**

5 Mixed land use in a CBD proves an attractive transit destination for many people, suggesting a  
 6 strong demand and need for SAV stations. With a focus on a high level-of-service and quick  
 7 alighting times, the pedestrian area is segregated from SAV traffic. As seen on Figure 3,  
 8 pedestrian amenities are centered towards the northwest of the station, conveniently situated  
 9 across from apartments as well as bike and car-sharing programs. Due to the high anticipated  
 10 traffic at this station, additional pedestrian amenities were provided such as restrooms and  
 11 shaded waiting areas to provide comfort to patrons who may choose to wait for a shared-vehicle.  
 12 Allowing for pedestrians to comfortably wait without impeding additional SAVs from entering  
 13 the system mimics the design of many taxi areas for airport facilities. These SAV storage areas  
 14 use diagonal parking to maximize the space and to allow for easy electric-vehicle (SAEV)  
 15 charging access. City of Austin parking standards require 17'6" x 9' space minima  
 16 ([www.municode.com](http://www.municode.com)), but SAVs do not need to accommodate human access while parked, and  
 17 many can be of compact or mini size; so their parking space standards can be reduced, in  
 18 addition to eliminating striping and its maintenance. A benefit of this system is its ability to  
 19 utilize presently unwanted or unused space, as shown in Figure 3, which incorporates the land  
 20 below a heavy-rail line just west of Austin's CBD.

21  
 22 The Seaholm redevelopment project, a major mixed use area in the Austin CBD, poses as an  
 23 exciting backdrop for a major metropolitan SAV station. The City of Austin owns a significant  
 24 amount of property in this area; and, with the addition of a brand new public library, the city will  
 25 be looking for different modes of transit to accommodate a growing amount of residents living in  
 26 the area. The Seaholm station is the most capable station to hold a large fraction of the fleet  
 27 system, given the projected density of the area, spurred by significant private investment as well

1 as the current accessibility of land underneath the railway. The capacity of this fleet station is 31  
2 vehicles (about 8% of the fleet analyzed here). The design incorporates three different  
3 components: an AV charging and storage area, a pick-up/drop-off area, and a waiting area  
4 complete with patron amenities.

### 6 *Airport Alighting Design and Application*

7 The following airport alighting design has considerable transferability to any major transit hub  
8 that would currently service taxis or rentals cars. Due to the similarities of the two systems,  
9 space may be able to be bought from existing infrastructure. Given the fixed drop-off locations in  
10 airports and the ease of implementation in terms of vehicle programming, this technology could  
11 also be seen as a way to transport people between terminals. Additional similarities to rental  
12 vehicle systems include the incorporation of a mixed-fleet (e.g., SUVs and hybrid electric  
13 vehicles), which can appeal to commuters outside of the major metropolitan region. The airport  
14 is a location of high demand in the Austin region, producing and attracting more daily trips than  
15 almost any other location in the region (Jin 2015). The need for public transit at this location is  
16 amplified due to the fact that users attempt to avoid costly parking fees by leaving their personal  
17 vehicles at home. These factors make the airport very appealing for one of the four major  
18 stations.


19  
20 The airport, being a unique piece of infrastructure, offers a major challenge, one with huge  
21 benefits if the design can encourage a portion of the 10.7 million of people that use the Austin  
22 Bergstrom International Airport annually. This design displays 20 parking spaces (offered to 5%  
23 of total 400 fleet vehicle system), which serves as an initial number to be scaled up longer-term.  
24 The Airport DRS-SAV station will be highly visible as potential customers leave the airport and  
25 its proximity to the airport's exits allows for easy access by DRS-SAV users. Speed of service  
26 will remain competitive with taxis due to a well positioned garage exit ramp that can be reached  
27 from the Airport DRS-SAV station.

### 29 *High Commercial Traffic Applications*

30 A potentially successful application of this system can be found in repurposing additional car  
31 park space for transit stations, providing use for impervious cover that may be underutilized.  
32 Attracting more patrons to these commercial areas would benefit neighboring retailers with  
33 increased traffic from a diverse group of people who may not otherwise have access to these  
34 areas. Applications regarding SAVs in high commercial areas have already seen implementation  
35 in Milton Keynes, expanding their test fleet to over 40 vehicles at the end of the calendar year  
36 (Gordon-Bloomfield 2015). SAV investment options suggest that densely developed commercial  
37 and retail areas, as well as self-contained environments (like university campuses, airports, and  
38 hospital campuses) are good initial candidates for SAV services. This relates to the broader idea  
39 of taking these car-friendly commercial areas and applying mixed-land use in coordination with  
40 a SAV fleet system to help reduce personal automobile usage. Very few materials were put into  
41 the roughly 200' x 85' area that was designated for this SAV fleet station. The 10-foot-wide  
42 raised pedestrian median provides SAVs with two designated routes on either side of the  
43 structure, which can house 14 AVs. Additional SAV parking is located in a nearby parking  
44 garage which will accommodate an additional 20 vehicles. Furthermore, benches, charging  
45 stations, and covered areas are all made available on the 140' x 10' median (Figure 4). Since the




1 proposed design is to use already existing concrete slab and striping, the design's difficulty will  
2 be greatly reduced. This commercial applicability is continued at Southpark Meadows, south of  
3 Austin's CBD, providing as a potential transit station for commuters coming from San Antonio.  
4

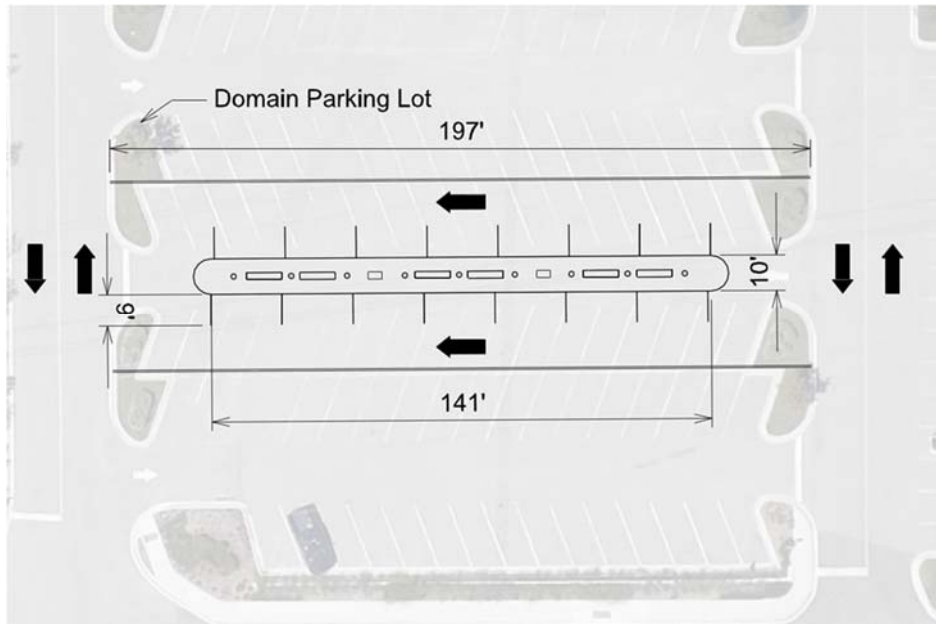

5 **FIGURE 4. Domain Site's DRS-SAV Station Design (Mixed-Use Shopping Center)**  
6

#### 7 *Queuing Areas Attributes and Locations*


8 Aside from the areas listed above for AV stations, the following areas were deemed attractive  
9 locations for rapid queuing areas. When considering the average wait time for a DRS-SAV  
10 system was less than two minutes, this further justifies these cost-effective queuing stations  
11 (Zhang 2015). These areas were chosen for queuing because although they do not have the land  
12 capable of supporting an entire station and do not need significant amenities, they still have the  
13 demand to support fleet usage. Similar to a bus pick-up stop, the station will provide customers  
14 with the bare-essentials in terms of amenities while allowing for quick pick-ups in high-density  
15 areas with a significant amount of turnover. The locations of these smaller facilities are dictated  
16 primarily on the trip volumes in that area and its ride-sharing attributes. Due to the limited  
17 number of queue spots, origin and departure time for the patron can vary but arrival-departure  
18 layover time for each vehicle will be relatively short, especially if there is a high demand at the  
19 station which would require additional queue space. The last two preliminary designs are  
20 standard designs for queuing areas that may be scattered about Austin. The first design is  
21 positioned along Rainey Street, a popular neighborhood-bar area near the Austin Convention  
22 Center. The second is located in Zilker Park, home to Austin City Limits Music Festival as well  
23 as other events. These designs can be translated with ease to other areas of the city, providing a  
24 streamlined system to cut down on design costs while providing a recognizable queue area for  
25 patrons.

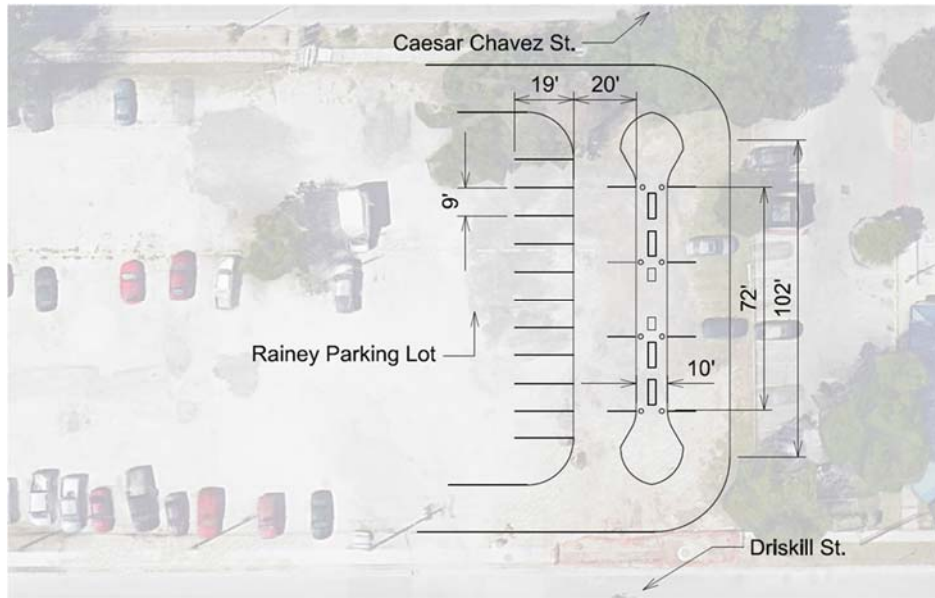

**FIGURE 5. Queuing Station for High Vehicle Turnover (Local Parking Lot)**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11

The Rainey queuing area mimics the design of the Domain location in that it provides a single entry and exit point with a raised median separating two lanes of SAV thru traffic (Figure 5). In total, the land area covers roughly 8,425 square feet. This area contains a ten foot bulb-in median curb with benches, and a covered area. The total median length is around 102 feet. Other design specifications include curbs on either side to allow for steady flow of traffic through the DRS-SAV pick-up/drop-off area which can house six AVs (three on either side). Additional considerations relating to the segregation of SAV with human operated vehicles will help to avoid delays associated with confused drivers potentially utilizing the system analysis.

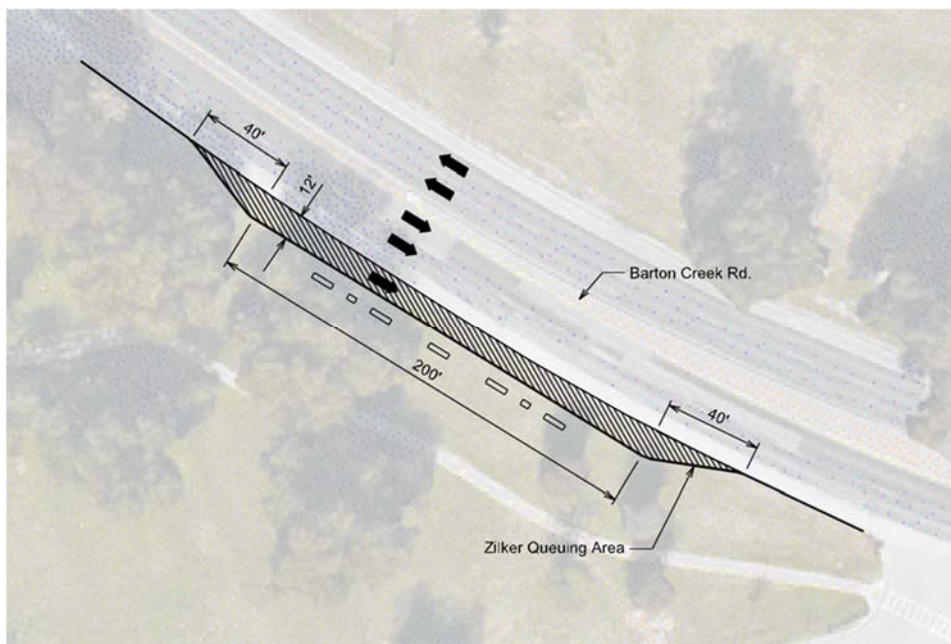

**FIGURE 6. Zilker Park Queuing Station Design (Roadside Site)**

12

1  
2 This design will be implemented in four other locations scattered throughout Austin: Arboretum  
3 mall, Mueller neighborhood, Barton Creek Square, and Sunset Valley queuing areas. Areas that  
4 already enjoy good transit access are valuable for SAV stations to function as a last-mile travel  
5 provider, if warranted or preferred by travelers. The additional four designs are to follow the  
6 Rainey Street design above with small variances due to site characteristics. See Table 2 for  
7 additional queuing area information.

8  
9 The Zilker queuing area is the last given design option for high-patron turnover. This is the most  
10 basic design given its specific focus on high turnover. Figure 6 shows the designated queuing  
11 areas meant for AVs. The project area specifications include a 12' wide, 200' long parking  
12 accessibility zone and a total square footage of around 2,700 square feet for the area of the  
13 project. This design, if relevant to the preferred alternative, will be implemented in four other  
14 locations scattered throughout Austin: University of Texas, Tuscan Business Park, Riverside,  
15 and Far West queuing areas.

16 **Table 2. Queuing Area Overview**

| Name                | Location   | Capacity (# AVs) | Cost Estimate (\$) | Special Features  |
|---------------------|--|------------------|--------------------|---|
| Rainey Street       | Downtown near Sixth Street & the Warehouse District                      | 15               | \$4,366,400        | Proximity to Trip Attractors such as the Convention Center, Town Lake, & bar-districts  |
| Arboretum           | US 183 South & Great Hills Trail near the North Capital of Texas Highway | 10               | \$1,802,500        | Mixed-use area with housing, offices, shops & restaurants as well as transit stops & pre-existing transit park & ride centers   |
| Mueller             | Central Austin east of I-35  | 15               | \$1,803,500        | Mixed-use redevelopment where alternative modes of transit are encouraged by the community  |
| Barton Creek Square | Intersection of Loop 1 & Capital of Texas Highway                        | 15               | \$1,803,500        | Close Proximity to highways as well as commercial areas   |
| Sunset Valley       | South of downtown at the intersection of Mopac & SH-71                   | 15               | \$1,803,500        | Small rural resident community which allows access to the hill country, a prime trip attractor & heavily commuted corridor into the CBD                               |
| Zilker Park         | South Austin east of Mopac   | 10               | \$655,500          | Access to trip attractors such as Town Lake, Barton Springs & a multitude of events that occur in this area (Austin City Limits Festival, The annual Trail of Lights) |
| Far West            | South of US 183, North of 2222, West of Mopac                            | 10               | \$655,500          | Mixed-use with a high density of student population, often without access to a vehicle  |

|                       |  |    |           |   |
|-----------------------|--|----|-----------|---|
| Tuscany Business Park | Northeast central Austin at intersection of Highway 290 & US 183 | 10 | \$655,500 | Serves an area of east Austin that has a recent influx of tech companies as well as access to tolled facilities which could support a park & ride for commuters out of the system |
| University of Texas   | Central Austin, next to I-35                                     | 15 | \$655,500 | 350 acre main campus, with 51,000 students, 24,000 faculty & staff  |
| Riverside             | Along Lady Bird Lake, east of I-35                               | 10 | \$655,500 | Major housing area as well as access to music venues & close proximity to a major interstate  |

1

2 **VEHICLE SPECIFICATIONS**

3 *Electric vs. Gas Powered*

4 Two major variables were experimented with when choosing the alternatives: number of  
5 locations and vehicle energy source. EVs were chosen for the AV fleet in alternatives 2 and 4.  
6 These vehicles are relatively inexpensive to fuel and comparatively minimize polluting their  
7 surroundings with noise and emissions. EVs offer a move away from gasoline usage which  
8 decreases dependence on foreign markets for energy. EVs are often associated with “range  
9 anxiety” but this is assuaged through advances and technology and EVs have significant amount  
10 of chargeable breaks when applied in a shared environment (Zhang et al 2015).

11

12 **PROJECT ALTERNATIVES EVALUATION**

13 The alternatives that include station and queuing areas, in addition to an increased vehicle fleet  
14 size (800 SAVS), offer the highest levels-of-service to the Austin network by providing a variety  
15 of locations and a larger AV fleet of 800 vehicles. These alternatives will be capable of  
16 accommodating more users than their counterparts (stations only with 400 vehicles, and a  
17 variance of gas and EV powered vehicles). However, the added queuing locations increase  
18 initial project cost and may not warrant the additional infrastructure initially.

19

20 Using the assumptions found in a similar study (Fagnant 2015), an average trip length of six  
21 miles was chosen for these alternatives with unoccupied vehicle miles travelled (VMT)  
22 accounting for 8% of this distance. The average trip length for alternatives with the additional  
23 infrastructure was adjusted to ten miles with unoccupied VMT also increasing to 20% of AV  
24 travel (due to increased location spacing). These adjustments account for the difference in  
25 average radii needed (around each location) to cover the entire network. Increased infrastructure  
26 may lead to shorter trips and less unoccupied VMT, if priced favorably to encourage system use  
27 in a transit-like setting and emphasis on ride sharing. Each of the alternatives offer benefits in the  
28 form of decreased hourly value of travel time from \$16.30 (Fagnant, 2014) to \$5.00 due to  
29 passengers’ ability to use their travel time productively or leisurely. These alternatives will also  
30 encourage ridesharing (achieving an average of 1.3 people per vehicle) and reduce the number of  
31 crashes.

32

33 **PREFERRED ALTERNATIVE AND PROJECT ANALYSIS**


34 This project was designed for a ten-year period, enabling a testing period suitable for studying  
35 how well the AV system will function in the Austin traffic environment. Emphasis was placed on

1 the B/C ratio in this evaluation as it offers a better summary of project impacts. Monetizing the  
 2 parameters to give an economists' perspective on the system was critical in defining the benefits  
 3 this system produces when adopted full scale. Table 3 shows the benefit of using an AV in terms  
 4 of the traveler's value of travel time.

5 **Table 3. Alternative 2 Sensitivity Analysis**

| Value of Travel Time                     |            |            |
|--|------------|------------|
| Number of Vehicles (NoV) =               | 200        | AVs        |
| Person Trips Per Day (PTPD) =            | 28.5       | trips      |
| Vehicle Trips Per Day (VTPD) =           | 21.9       | trips      |
|  |            |            |
| Average Trip Length (ATL) =              | 10.0       | miles      |
| Daily Miles Traveled per Vehicle (DMT) = | 219.2      | miles      |
| AV Yearly Miles Traveled (YMT) =         | 16,014,808 | miles      |
| Occupied Yearly Miles Traveled (OYMT) =  | 13,345,673 | miles      |
|  |            |            |
| AV VOTT =                                | 5.0        | \$/hr      |
| Non AV VOTT =                            | 16.3       | \$/hr      |
| Difference =                             | 11.3       | \$/hr      |
|  |            |            |
| Average Vehicle Speed (AVS) =            | 26.0       | mph        |
| Occupied Yearly Travel Time (OYTT) =     | 513,295    | hours      |
| VOTT Yearly Savings =                    | 5,800,235  | \$         |
|  |            |            |
| Unmanned Miles Traveled =                | 2,669,135  | miles/year |

6

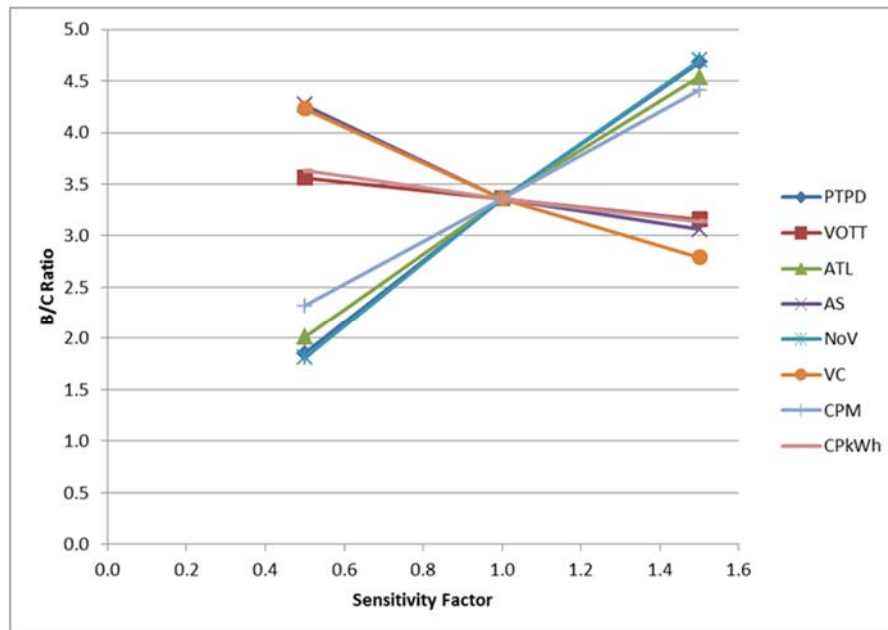

7 **FIGURE 7. 400 EVs Utilizing 4 Stations: Sensitivity Analysis**

8  
 9  
 10 The alternative using EVs with 4 station hub centers utilizing 400 EVs had the highest B/C ratio  
 11 of 4.42, corresponding with an IRR of 103%. This selection reasoned with the fact that additional

1 construction and maintenance of a larger fleet system with queuing areas outweigh the benefits  
 2 of having a larger network. The higher fuel costs associated with gas-powered vehicles shifted  
 3 the selection in favor of an EV fleet. Two additional benefits of utilizing electric vehicles are  
 4 reduced dependence on foreign markets and long term sustainability.

5  
 6 The sensitivity analysis performed (illustrated in Figure 7 with corresponding data in Table 4)  
 7 reveals important relationships. Number of vehicles, person-trips-per-day, average trip length,  
 8 and cost per-mile proved to be the parameters with the most significant impact on B/C Ratio.  
 9 Therefore, the accuracy of certain assumptions made in this report could have significant impacts  
 10 on the system’s success. The sensitivity analysis provides knowledge that can be used to make  
 11 informed decisions regarding adjustments and their likely effects on the system.

12  
 13 **Table 3. Alternative 2 Sensitivity Analysis**

| Sensitivity Analysis         |        |                    |      |         |
|------------------------------|--------|--------------------|------|---------|
| Variable                     | Value  | Sensitivity Factor | B/C  | IRR (%) |
| Person Trips Per Day         | 14.25  | 0.5                | 1.85 | 24      |
|                              | 28.5   | 1.0                | 3.36 | 58      |
|                              | 42.75  | 1.5                | 4.68 | 90      |
| Value of Travel Time (\$/hr) | 2.5    | 0.5                | 3.56 | 62      |
|                              | 5      | 1.0                | 3.36 | 58      |
|                              | 7.5    | 1.5                | 3.16 | 54      |
| Average Trip Length (mi)     | 5      | 0.5                | 2.01 | 28      |
|                              | 10     | 1.0                | 3.36 | 58      |
|                              | 15     | 1.5                | 4.54 | 87      |
| Average Speed (mph)          | 13     | 0.5                | 4.27 | 76      |
|                              | 26     | 1.0                | 3.36 | 58      |
|                              | 39     | 1.5                | 3.06 | 52      |
| Number of Vehicles           | 300    | 0.5                | 1.81 | 23      |
|                              | 600    | 1.0                | 3.36 | 58      |
|                              | 900    | 1.5                | 4.70 | 90      |
| Vehicle Cost (\$)            | 30,000 | 0.5                | 4.23 | 72      |
|                              | 60,000 | 1.0                | 3.36 | 58      |
|                              | 90,000 | 1.5                | 2.79 | 48      |
| Cost Per Mile (\$)           | 0.5    | 0.5                | 2.32 | 36      |
|                              | 1      | 1.0                | 3.36 | 58      |
|                              | 1.5    | 1.5                | 4.41 | 79      |
| Cost Per kWh (\$)            | 0.075  | 0.5                | 3.63 | 60      |
|                              | 0.15   | 1.0                | 3.36 | 58      |
|                              | 0.225  | 1.5                | 3.14 | 57      |

14  
 15 Due to this unique endeavor, starting small may make initial financial sense, but system-wide  
 16 adoption and the need for increased mobility may see exponential affects and high demand.


17  
 18 **FURTHER SYSTEM ENHANCEMENTS**

19 The proposed enhancements offer a variety of differing options and amenities, which can meet a  
 20 multitude of patron preferences. Dealing with fleet options, a multiplicity of vehicles would  
 21 allow for a variety of customers, providing differing levels of service. With the use of a fuel-  
 22 efficient hybrid fleet, patrons could travel between cities (i.e. Austin-Dallas) and skip the hassle  
 23 often associated with flying. Short-term car rentals at the periphery stations could allow for  
 24 increased service, but additional consideration will focus on increased unmanned vehicle time  
 25 and increased collaboration to find cost-efficient ways to return the vehicle once the one-way  
 26 destination has been served. The data from Zhang (2015) may suggest fewer patron amenities at  
 27 stations, with the average wait time with a 700 vehicle fleet only at 1.7 minutes. This data lends  
 28 itself to borrowing space in unused parking lots and only the need to provide signage to notify  
 29 patrons on where to wait. This minimalistic approach can serve underutilized areas for a fraction

1 of the calculated station cost. Project simulation to complement and possibly validate results of  
2 others' simulation would be useful to pursue, as an extension of this research. Further emphasis  
3 should be added to encourage and build systems in place for disable patrons and older  
4 individuals who may not have access to smart phones.  
5

### 6 **ALTERING OUR URBAN ENVIRONMENTS: RIPPLE EFFECTS OF AN SAV-DRS** 7 **SYSTEM**

8 SAVs and DRS may transform the automotive industry, much like Henry Ford's Model T. Urban  
9 areas have the ability to become even more land efficient by opening doors to new opportunities  
10 with their extra space. Zhang's (2015) base simulation called for over 90 percent in parking  
11 reductions, with only a small market penetration of the vehicles on the roadway. All in all, this  
12 would amount to drastically planned urban environments, allowing for more density and the  
13 opportunities for cities to revitalize their CBD area.  
14

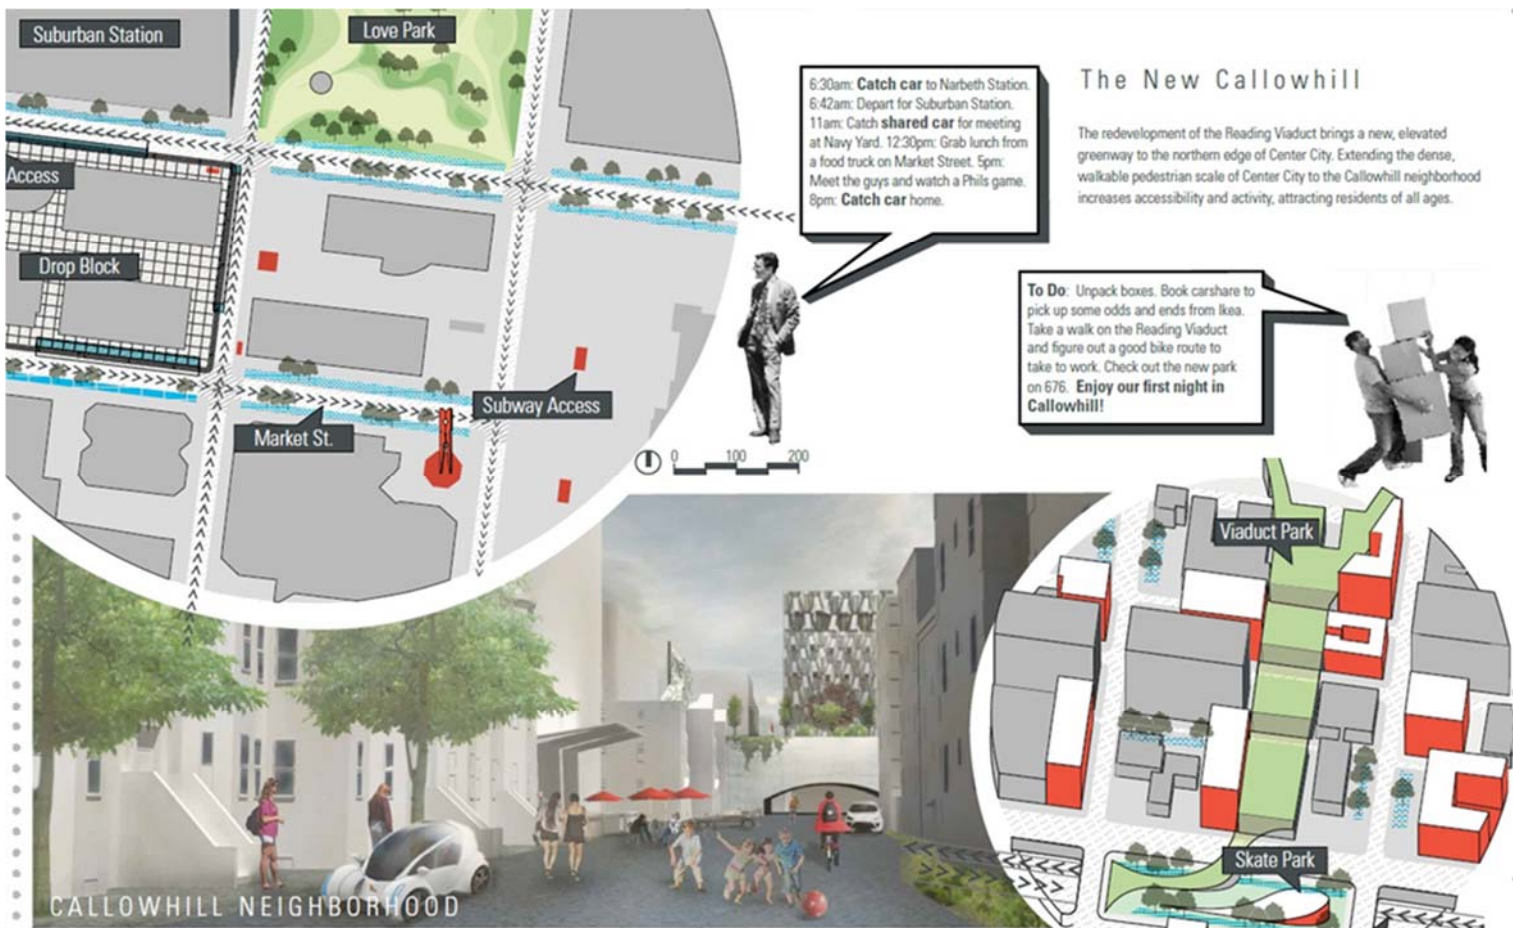

15 **FIGURE 8. Benefits of SAVs are seen in a redevelopment concept (Baker et al 2014)**  
16

17 Many cities could then shift their focus on how to provide infrastructure to suit these reduced  
18 transit needs and could further enhance the SAV system. Parking for these vehicles would be  
19 more efficient and cost effective as the cars can be packed in together, eliminating pedestrian  
20 traffic (Zhang and Guhathakurta 2015). Many of the cities in the US created their planned areas

1 based on the automobile and the predicted reductions due to SAVs could change our urban  
2 environment as seen in the Independense design regarding land-use due to AVs (Baker et al  
3 2014). Will tolled roads alter their infrastructure to attract these vehicles to increase throughput  
4 on their roadways? Could property values near these roadways increase if signage is eliminated  
5 and congestion is prevented? Will our roads be able to transform from thoroughfares for AVs  
6 during morning and afternoon peak to pedestrian friendly areas during the lunch hour? Urbanites  
7 also could be looking at the pavement for innovation and reap the benefits among the asphalt  
8 areas which can be modified for business or environmental benefits.

## 9 10 **CONCLUSIONS**

11 Automobiles previously had no concerns systematically but, will soon provide increased usable  
12 area for our roadways. SAVs operate more often than traditional personally owned vehicles, and  
13 by serving trip generators, allow for increased trip-chaining as well as utilizing active transit.  
14 Land-use and parking infrastructure are some of the areas with which SAVs have the ability to  
15 transform and eliminate, respectively. The design elements regarding this SAV system highlight  
16 vehicle amenities as well as station amenities. This 400 vehicle fleet system serves as an  
17 indication of this system's financial possibilities, producing a benefit/cost ratio of 4.42. Through  
18 a basic cost evaluation and monetized systematic benefits, a pilot electric-vehicle fleet system  
19 will serve 11,400 people per day and each SAV has the potential to eliminate 14 vehicles of the  
20 roadway network. Further vehicle incorporation should be the next step in noticing an increasing  
21 amount of benefits given to vehicles that can communicate between each other and outperform  
22 their human counterpart in operating a vehicle.

## 23 24 **ACKNOWLEDGEMENTS**

25 This paper would not be possible without the help of Conley Satterfield, Daniel DiJoseph and  
26 Sara McNeil. Together with this paper's lead author, these students worked tirelessly during the  
27 spring 2015 semester in a capstone (scenario design) course towards a final project topic worthy  
28 of further development and dissemination. We appreciate the comments of several anonymous  
29 reviewers, and Scott Schauer-West's review and administrative support.

## 30 31 **REFERENCES**

32 Appelbaum, Binyamin (2011) As U.S. Agencies Put More Value on a Life, Businesses Fret. *The*  
33 *New York Times*. Available at  
34 [http://www.nytimes.com/2011/02/17/business/economy/17regulation.html?\\_r=0](http://www.nytimes.com/2011/02/17/business/economy/17regulation.html?_r=0).

35  
36 Baker, Scott, Kate Benisek, Ruslan Filipau, Andrea Haynes, and Ashley Pellitier (2014). Ed  
37 Bacon Student Design Competition Driverless Vehicles. 2014. Philadelphia Center for  
38 Architecture. Available at <[http://philadelphiacfa.org/competitions/better-philadelphia-](http://philadelphiacfa.org/competitions/better-philadelphia-challenge/past-competitions-winners/2014-how-will-driverless-vehicles-shape-philadelphia-tomorrow)  
39 [challenge/past-competitions-winners/2014-how-will-driverless-vehicles-shape-philadelphia-](http://philadelphiacfa.org/competitions/better-philadelphia-challenge/past-competitions-winners/2014-how-will-driverless-vehicles-shape-philadelphia-tomorrow)  
40 [tomorrow](http://philadelphiacfa.org/competitions/better-philadelphia-challenge/past-competitions-winners/2014-how-will-driverless-vehicles-shape-philadelphia-tomorrow)>.

41  
42 Derr, Gordon (2014) City of Austin Taxi Information. Austin, Texas.

43  
44 Fagnant, Daniel and Kara Kockelman (2015) Dynamic Ride-Sharing and Optimal Fleet Sizing  
45 for a System of Shared Autonomous Vehicles. Forthcoming in *Transportation*. Available at  
46 [http://www.cae.utexas.edu/prof/kockelman/public\\_html/TRB15SAVswithDRSinAustin.pdf](http://www.cae.utexas.edu/prof/kockelman/public_html/TRB15SAVswithDRSinAustin.pdf).



1  
2 Fagnant, Daniel and Kara Kockelman (2015) Preparing a Nation for Autonomous Vehicles  
3 Opportunities, Barriers and Policy Recommendations for Capitalizing on Self-Driven Vehicles.  
4 Forthcoming in *Transportation Research Part A*. Available at  
5 [http://www.cae.utexas.edu/prof/kockelman/public\\_html/TRB14EnoAVs.pdf](http://www.cae.utexas.edu/prof/kockelman/public_html/TRB14EnoAVs.pdf)  
6  
7 Fagnant, Daniel and Kara Kockelman (2014) The Travel and Environmental Implications of  
8 Shared Autonomous Vehicles, using Agent-Based Model Scenarios. *Transportation Research*  
9 *Part C* 40: 1-13. Available at  
10 [http://www.cae.utexas.edu/prof/kockelman/public\\_html/TRB14SAVenergy\\_emissions.pdf](http://www.cae.utexas.edu/prof/kockelman/public_html/TRB14SAVenergy_emissions.pdf)  
11  
12 Fagnant, Daniel, and Kara Kockelman (2015). Operations of a Shared Autonomous Vehicle  
13 Fleet for the Austin, Texas Market. *Transportation Research Record* No. 2536: 98-105.  
14 Available at [http://www.cae.utexas.edu/prof/kockelman/public\\_html/TRB15SAVsinAustin.pdf](http://www.cae.utexas.edu/prof/kockelman/public_html/TRB15SAVsinAustin.pdf)  
15  
16 Gordon-Bloomfield, Nikki (2015). UK Officially Begins Massive, Multi-City Autonomous  
17 Vehicle Project Today. *Transport Evolved*. Available at  
18 [https://transportevolved.com/2015/02/11/uk-officially-begins-massive-multi-city-autonomous-](https://transportevolved.com/2015/02/11/uk-officially-begins-massive-multi-city-autonomous-vehicle-pilot-project-today/)  
19 [vehicle-pilot-project-today/](https://transportevolved.com/2015/02/11/uk-officially-begins-massive-multi-city-autonomous-vehicle-pilot-project-today/)  
20  
21 Jin, P. J., Fagnant, D., Hall, A., Walton, C. M., Hockenyos, J., and Mike Krusee (2013)  
22 Developing Emerging Transportation Technologies in Texas. Report No. FHWA/TS-13/0-6803-  
23 1. Center for Transportation Research. Texas Department of Transportation Research and  
24 Technology Implementation Office. Available at [http://library.ctr.utexas.edu/ctr-publications/0-](http://library.ctr.utexas.edu/ctr-publications/0-6803-1.pdf)  
25 [6803-1.pdf](http://library.ctr.utexas.edu/ctr-publications/0-6803-1.pdf)  
26  
27 Jin, Peter J. et al. (2012) Urban Travel Demand Analysis for Austin TX USA using Location-  
28 based Social Networking Data. Proceedings of the 92<sup>nd</sup> Annual Meeting of the Transportation  
29 Research Board Meeting. Available at  
30 [http://www.topslab.wisc.edu/publications/2013/Urban%20Travel%20Demand%20Analysis%20for%20Austin%20TX%20USA%20using%20Location-](http://www.topslab.wisc.edu/publications/2013/Urban%20Travel%20Demand%20Analysis%20for%20Austin%20TX%20USA%20using%20Location-based%20Social%20Networking%20Data%20(13-2374).pdf)  
31 [based%20Social%20Networking%20Data%20\(13-2374\).pdf](http://www.topslab.wisc.edu/publications/2013/Urban%20Travel%20Demand%20Analysis%20for%20Austin%20TX%20USA%20using%20Location-based%20Social%20Networking%20Data%20(13-2374).pdf)  
32  
33  
34 Jorge, Diana, and Goncalo Homem De Almeida Correia (2013) Carsharing Systems Demand  
35 Estimation and Defined Operations: A Literature Review *European Journal of Transport and*  
36 *Infrastructure Research*. Available at  
37 [http://www.ejtir.tudelft.nl/issues/2013\\_03/pdf/2013\\_03\\_02.pdf](http://www.ejtir.tudelft.nl/issues/2013_03/pdf/2013_03_02.pdf).  
38  
39 Kockelman, K. M., Chen, T. D., Larsen, K. A., and Brice G. Nichols (2013) *The Economics of*  
40 *Transportation Systems: Developed for the Texas Department of Transportation A Reference for*  
41 *Practitioners*. Amazon's CreateSpace. Available at  
42 [http://www.cae.utexas.edu/prof/kockelman/TransportationEconomics\\_Website/homepage.html](http://www.cae.utexas.edu/prof/kockelman/TransportationEconomics_Website/homepage.html).  
43  
44 Kessler, Aaron, and Vlastic, Bill (2015) Semiautonomous Driving Arrives, Feature by Feature.  
45 *The New York Times*. April 2. Available at

1 [http://www.nytimes.com/2015/04/03/automobiles/semiautonomous-driving-arrives-feature-by-](http://www.nytimes.com/2015/04/03/automobiles/semiautonomous-driving-arrives-feature-by-feature.html?_r=0)  
2 [feature.html?\\_r=0](http://www.nytimes.com/2015/04/03/automobiles/semiautonomous-driving-arrives-feature-by-feature.html?_r=0)  
3  
4 Korhauser, Alain. (2015) Uncongested Mobility for All: New Jersey's Area-wide aTaxi System.  
5 Operations Research and Financial Engineering. Princeton University. Available at  
6 [http://orfe.princeton.edu/~alaink/NJ\\_aTaxiOrf467F12/ORF467F12aTaxiFinalReport\\_Draft.pdf](http://orfe.princeton.edu/~alaink/NJ_aTaxiOrf467F12/ORF467F12aTaxiFinalReport_Draft.pdf).  
7  
8 Litman, Todd. (2013) Autonomous Vehicle Implementation Predictions: Implications for  
9 Transport Planning. *Victoria Transport Policy Institute*. Victoria Transport Policy Institute.  
10 Available at  
11 [http://orfe.princeton.edu/~alaink/SmartDrivingCars/Reports&Speeches\\_External/Litman\\_Auton](http://orfe.princeton.edu/~alaink/SmartDrivingCars/Reports&Speeches_External/Litman_AutonomousVehicleImplementationPredictions.pdf)  
12 [omousVehicleImplementationPredictions.pdf](http://orfe.princeton.edu/~alaink/SmartDrivingCars/Reports&Speeches_External/Litman_AutonomousVehicleImplementationPredictions.pdf)  
13  
14 Santi, Paolo, Giovanni Resta, Michael Szell, Stanislav Sobolevsky, Steven H. Strogatz, and  
15 Carlo Ratti (2014). Quantifying the Benefits of Vehicle Pooling with Shareability Networks.  
16 *Proc's of the National Academy of Sciences of the United States of America*. Available at  
17 <http://www.pnas.org/content/111/37/13290>  
18  
19 "Section 9 - Parking." City of Austin, n.d. Web. 04 Nov. 2015.  
20 <[https://www.municode.com/library/tx/austin/codes/transportation\\_criteria\\_manual?nodeId=TR](https://www.municode.com/library/tx/austin/codes/transportation_criteria_manual?nodeId=TR)  
21 [CRMA\\_S9PA\\_9.2.0PALODE](https://www.municode.com/library/tx/austin/codes/transportation_criteria_manual?nodeId=TR)>.  
22  
23 Tesla Motors.com, 14 Oct. 2015. Web. 04 Nov. 2015. <[http://www.teslamotors.com/blog/your-](http://www.teslamotors.com/blog/your-autopilot-has-arrived)  
24 [autopilot-has-arrived](http://www.teslamotors.com/blog/your-autopilot-has-arrived)>.  
25  
26 Yeomans, Gillian. (2014) Autonomous Vehicles Handing Over Control: Opportunities and Risks  
27 for Insurance. Lloyds. 2014. Available at  
28 [https://www.lloyds.com/~media/lloyds/reports/emerging%20risk%20reports/autonomous%20ve](https://www.lloyds.com/~media/lloyds/reports/emerging%20risk%20reports/autonomous%20vehicles%20final.pdf)  
29 [hicles%20final.pdf](https://www.lloyds.com/~media/lloyds/reports/emerging%20risk%20reports/autonomous%20vehicles%20final.pdf)  
30  
31 Zhang, Wenwen, Subhrajat Guhathakurta, Jinqi Fang, and Ge Zhang. (2015) The Performance  
32 and Benefits of a Shared Autonomous Vehicles Based Dynamic Ridesharing System: An Agent-  
33 Based Simulation Approach. Proceedings of the 94<sup>th</sup> *Transportation Research Board*. Available  
34 at <http://trid.trb.org/view.aspx?id=1337820>.  
35