

TRANSPORTATION ELECTRIFICATION AND GRID INTEGRATION: ENVIRONMENTAL BENEFITS, OPERATIONAL CHALLENGES, AND FLEET- LEVEL IMPLICATIONS

Lin Su

Maseeh Department of Civil, Architectural and Environmental Engineering
The University of Texas at Austin
301 E. Dean Keeton St, Stop C1761, Austin, TX, 78712
sulin@utexas.edu
ORCID: <https://orcid.org/0000-0001-5507-0389>

Kara M. Kockelman, Ph.D., P.E.

(Corresponding Author)

Dewitt Greer Professor in Engineering
Maseeh Department of Civil, Architectural and Environmental Engineering
The University of Texas at Austin
301 E. Dean Keeton St, Stop C1761, Austin, TX, 78712
kkockelm@mail.utexas.edu
Tel: 512-471-0210

Submitted to *Bridging Transportation Researchers Conference*, 2025

Key Words: Electric vehicles, Electric vehicle charging station, Smart grid, Renewable energy

ABSTRACT

Electrification offers significant benefits in transportation by reducing noise, emissions, and costs, especially when paired with shared mobility and vehicle automation. This paper comprehensively synthesizes recent advances in electric vehicle (EV) adoption, charging infrastructure planning, and vehicle-grid integration, with a focus on both privately-owned EVs and emerging shared autonomous electric vehicle (SAEV) fleets. Smart-charging strategies amplify SAEV fleets' benefits, lowering greenhouse gas (GHG) emissions by up to 35.8% and energy consumption by over 40% compared to conventional fleets. Strategic charging infrastructure planning is important for scaling SAEV development. This work contributes by sorting typical EVCS planning strategies and summarizing optimization-based siting and sizing approaches, comparing objectives, constraints, and algorithms. It also details the role of smart-charging strategies in lowering energy consumption, reducing emissions, and improving grid stability. Building on this synthesis, the paper identifies challenges and outlines future research avenues, including integrated infrastructure-grid planning, behavioral shifts in emerging mobility systems, and real-time operational strategies aligned with energy market dynamics.

1. INTRODUCTION

United States energy consumption is dominated by transportation and industrial sectors, which together account for nearly three-quarters of total end-use energy, at 28 quadrillion British thermal units (Btu) (37.4%) and 26.1 quadrillion Btu (34.9%), respectively, in 2023 (U.S. EIA, 2024a). As the world economy grows relatively rapidly, understanding the impacts of advances in transportation technologies (including electrification) on energy demand and carbon emissions becomes crucial for long-term planning. While GDP-per-capita growth is generally a key driver of energy demand, many cities and nations have decoupled that relationship. For example, Austin, Texas set the goal for carbon neutrality in

2007 and cut its carbon footprint by 75% over the following 9 years (Kinder Institute for Urban Research, 2019). This highlights the potential of decoupling population growth with rising carbon emissions through policy planning, technology advances, and energy source transition.

In addition, growing use of energy-intensive technologies, like artificial intelligence (AI), adds demand to the power grid. For instance, Lawrence Berkeley National Laboratory (LBNL) reported that data centers consumed 4.4% of U.S. electricity in 2023 and are predicted to consume 6.7% to 12% by 2028 (Shehabi et al., 2024). Dallas-Fort Worth held 141 of Texas' 279 data centers in 2024, demanding up to 0.565 GW power in 2023 simultaneously (Donald and Grubbs, 2024). These trends emphasize the need for smarter grid management to ensure reliability and integrate renewable resources, while accommodating rising demands (from vehicle and heating electrification, data centers, and industrial loads).

The shift toward EVs requires significant infrastructure upgrades and smart grid strategies to mitigate excessive pressure on already inefficient systems. It also offers a promising solution to reduce emissions, especially when integrated with renewable energy resources. Renewables are a fast-growing energy source, contributing 24% of U.S. electricity generation in early 2022, with Texas leading national renewable energy production (Power Up Texas, 2025). Smart-charging strategies, such as day-ahead charging and vehicle-to-grid technologies, have gained attention in recent studies for their potential to optimize EV charging by aligning with renewable energy availability and dynamic grid load (Dean et al., 2023; Dahiwalé et al., 2024). These strategies reduce emissions, mitigate grid stress, and enhance overall system efficiency.

EVs are viewed as less environmentally damaging than internal-combustion-engine (ICE) vehicles, and produce roughly half the lifetime emissions of comparable ICE designs, due to embodied emissions during battery and vehicle manufacture (IEA, 2021; U.S. EPA, 2025). Automation, electrification, and sharing technologies are impacting vehicle ownership, mode choices and travel patterns (Sperling, 2018). Such technologies have given rise to shared autonomous vehicles (SAVs) and shared autonomous all-electric vehicles (SAEVs), which offer convenient door-to-door services as a potential alternative to conventional privately owned vehicles (POVs) (Heineke et al., 2023). Meanwhile, ride-hailing platforms are transitioning to all-electric fleets in alignment with zero-emission goals and government regulations. For example, Uber is now offering SAEVs (via Waymo) in Los Angeles and Austin, and aims to expand to other cities across the U.S., Canada, and Europe by 2030, with 100% of rides and deliveries globally in zero-emission vehicles by 2040 (Uber, 2024a). Similarly, Lyft committed to transitioning to 100% EVs to lead the shift toward zero emissions (Lyft, 2020).

Despite these advances, transportation electrification and autonomous vehicles remain in their early stages. Considerable uncertainty remains regarding the optimal smart-charging strategies to improve total system efficiency, their impacts on energy consumption trends and environment, and appropriate policies to support the development. There is a lack of comprehensive studies on the combined impacts of ride-hailing fleet electrification, charging infrastructure, and smart-charging strategies on grid stability and emissions. This research addresses these gaps by exploring the following research questions (RQs):

RQ1: What are the environmental benefits and challenges of private vehicle and fleet electrification?

RQ2: What siting and sizing charging infrastructure methods can support large-scale EV adoption while considering operational and environmental impacts?

RQ3: What smart charging strategies can be applied, and how do they contribute to emission reduction and grid stability?

The contributions of this work are threefold. First, it provides a systematic review of alternative fuel vehicles' environmental impacts and clarifies how emerging technologies and innovative strategies influence energy consumption and emissions. Second, it summarizes the potential of smart-charging strategies, such as day-ahead charging and vehicle-to-grid approaches, to optimize fleet operations, reduce emissions, and enhance grid stability. Third, it proposes future research directions to bridge gaps

in charging infrastructure planning, fleet electrification, and integration of renewable energy resources. By exploring the interplay among those elements, this work supports policymakers, fleet operators, and researchers in designing strategies that enhance grid resilience, reduce emissions, and accelerate the transition to a sustainable and low-emission transportation future.

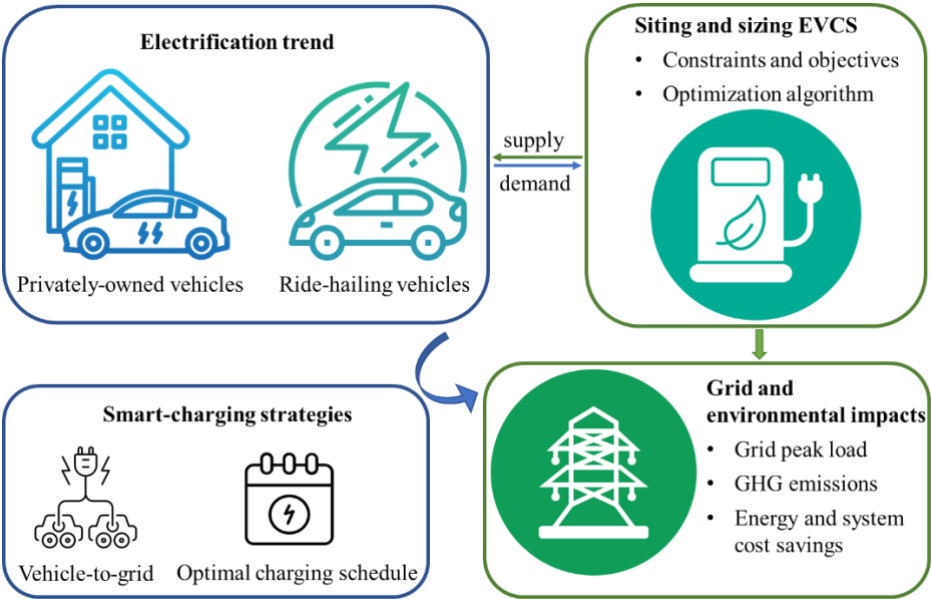


Figure 1. Contents of Paper Review

Figure 1 illustrates the structure of this review. The following section provides an overview of transportation electrification trends, focusing on privately owned vehicles, the integration of automation in ride-hailing, and their environmental impacts. Section 3 discusses charging infrastructure planning strategies, covering key constraints considered, objectives, and optimization methods for siting and sizing EVCS. Section 4 reviews smart-charging strategies and their impacts on grid performance, energy, and the environment. Section 5 outlines future research opportunities and potential solutions, followed by conclusions and recommendations summarized in Section 6.

2. TRANSPORTATION ELECTRIFICATION TREND AND IMPACTS ON THE ENVIRONMENT

This section explores the electrifying trend in transportation, focusing on both POVs and ride-hailing fleets. Advances in technology, policy incentives, and shifting consumer preferences are driving EV adoption, but challenges like infrastructure gaps, grid integration, and lifecycle emission persist. The following subsections highlight the opportunities and challenges associated with widespread electrification by synthesizing recent adoption trends, environmental impacts, and operational considerations.

2.1 Electrification of Privately Owned Vehicles

The electrification of POVs is an important component of transportation decarbonization, driven by advances in battery technology, government incentives, and growing infrastructure support. The global EV market is expanding rapidly, with nearly 14 million new EVs registered in 2023, with 95% of them in China, Europe, and the United States, bringing the total to 40 million worldwide (IEA, 2024).

Battery electric vehicles (BEVs) offer significant environmental benefits compared to internal combustion engine (ICE) vehicles, primarily by reducing fossil fuel dependence. The U.S. Department of Energy (U.S. DOE, 2025) highlights the efficiency advantage of electric motors, which convert over 77% of grid

electricity into usable power, compared to gasoline vehicles, which achieve only 12-30% of the energy stored in gasoline to power at the wheels. Despite the growing adoption trend, consumer hesitation persists. Several factors influence the pace of POV electrification, including vehicle costs, charging accessibility, range anxiety, and consumer attitudes. Guo et al. (2021) highlighted that while EV adoption has progressed significantly over the past decade, many consumers still prefer gasoline-powered vehicles due to concerns over range and charging infrastructure. Based on a U.S. stated preference survey of over 1,300 respondents, it was found that perceived advantages of BEVs and range anxiety have a statistically significant impact on purchase intentions. Similarly, Tamor et al. (2022) emphasized that BEVs will become acceptable to most households when three key conditions are met: an all-weather range exceeding 500 km (300 miles), convenient Level 2 overnight charging at home, and accessible fast charging for long journeys. Under these conditions, up to 98% of conventional vehicles could be replaced, electrifying 90% of personal vehicle travel. Sheppard et al. (2021) estimated that private EVs with uncontrolled charging can reduce GHG emissions by 46% compared to gasoline vehicles, while controlled charging can achieve a 49% reduction and reduce peak charging demand by 53%. In addition, Sambasivam et al. (2023) results showed that fully managed charging can reduce system costs by 2% with relatively lower need for battery storage compared to unmanaged charging. Furthermore, Powell et al. (2022) projected that EV adoption, coupled with grid decarbonization, could reduce CO₂ emissions per mile to between 84 g and 93 g by 2035, depending on adoption rates.

Despite these benefits, battery production, recycling, and energy sourcing remain major concerns (Coffman et al., 2015; Huang et al., 2022). Ramachandaramurthy et al. (2023) identified driving and charging obstacles, as well as consumer willingness to pay, as additional key barriers to EV adoption. Qadir et al. (2024) further categorized these challenges into infrastructure, cost, energy transition, and market-related issues. For instance, the sparse charging network and higher upfront costs of EVs compared to ICEVs continue to hinder widespread adoption. Additionally, the integration of EVs into the electricity grid poses operational challenges. Powell et al. (2022) warned that rapid EV adoption could increase peak net electricity demand by up to 25% by 2035, with a 50% increase under full electrification scenarios. This underscores the need for optimized charging controls and infrastructure build-out to mitigate grid strain.

POV electrification brings environmental benefits, including reduced GHG emissions and improved energy efficiency. However, addressing operational challenges such as grid stability, renewable resources integration, and consumer adoption barriers, is essential to fully realizing its potential. With continued advancements in battery performance, policy support, and grid integration strategies, POV electrification is expected to play an important role in achieving net-zero emission targets.

2.2 Emerging Technology with Ride-hailing Fleet Electrification

Synergy among sharing, automation, and electrification promotes reduction in GHG emissions in the transportation sector. According to the McKinsey ACES survey, 56% of consumers are willing to replace private vehicle trips with shared autonomous vehicles (Heineke et al., 2023). This shift is already underway; for example, Waymo has collaborated with Uber platform to serve ride requests with SAEVs in Austin and Atlanta city, and operated 24/7 in San Francisco, Phoenix, and Los Angeles (Waymo, 2025). The environmental benefits brought by this transition are substantial, including reductions in CO₂ emissions, noise pollution, and saving in energy consumption (Martinez et al., 2024).

SAVs simplify vehicle access, avoid parking costs, and reduce fleet size, enabling them to meet diverse travel demands and remaining competitive in the ride-hailing market (Loeb et al., 2018). Electrification enhances these benefits, as EVs are more energy-efficient, reliable, and environmentally friendly, especially when paired with renewable energy resources (Loeb and Kockelman, 2019; Loeb et al., 2018). Jones and Leibowicz (2019) demonstrated that widespread SAV adoption accelerated EV market penetration, largely lowering costs and emissions. Fagnant (2014) found that each SAV could replace around 10 conventional vehicles, reducing energy use by 16% and volatile organic compound (VOC)

emissions by 48% per person-trip. Further work by Shaheen and Bouzaghrane (2019) estimated that energy use could decline by 55% with widespread SAV deployment. Additionally, Gawron et al. (2019) predicted the strategic development of an electrified autonomous fleet in Austin, Texas, could reduce cumulative energy and GHG emissions by 60%. Zhong et al. (2023) expanded on these findings, showing that appropriate SAV pricing strategies could reduce PM2.5 emissions and energy consumption by 56% to 64% and 53% to 61%, respectively, with electrification boosting these reductions to 76% and 74%.

Centrally managed SAEV fleets could deliver services comparable to those conventional ride-hailing companies but at lower costs and reduced GHG emissions. Chen et al. (2016) found that a 200-mile range SAEV could replace 5.5 POV, serving 96% to 98% of trips requests with an average wait time of 7 to 10 minutes. Similarly, Sheppard et al. (2021) estimated that an SAEV fleet just 9% the size of existing active vehicle fleet could meet travel request, lowering lifecycle costs to 41% of a private EV fleet while cutting GHG emissions by 70%.

Figure 2 compares CO₂ emissions per passenger-mile traveled (PMT) across transportation modes, highlighting the benefits of electrified ride-hailing fleets. Air travel has the highest emissions, with business class producing 3 times more CO₂ (2.06 lbs per miles traveled – not recognizing the additional damage air travel does (Nichols et al., 2015)) than economy class, and first class emitting roughly 4 times as much (Future Tracker, 2023). In contrast, eBikes are ideal option for short trips, emitting just 0.01 lbs CO₂/PMT (Bosch eBike, 2025) due to minimal electricity consumption. While BEVs may produce no tailpipe emissions, their manufacturing and charging processes still generate GHG. On average, gasoline cars emit 0.77 lbs CO₂/PMT, while BEVs (0.44 lbs CO₂/PMT) and plug-in hybrid EVs (0.57 lbs CO₂/PMT) emit less (MIT Climate Portal, 2022). Traditional ride-hailing services in the U.S. and Canada produce 0.68 lbs CO₂/PMT, while Europe’s higher proportion of EVs reduces this to 0.42 lbs (Uber, 2024b). Transit buses average 0.95 lbs CO₂/PMT (emissions fall as occupancy rises), whereas the intercity buses emit far less at 0.15 lbs CO₂/PMT on average (Shirley and Gecan, 2023). Simulations in the Austin 6-county region, Texas, suggested that SAEVs can achieve zero-carbon transportation when paired with renewable energy, offering a significant advantage over gasoline-powered vehicles and traditional ride-hailing services (Loeb and Kockelman, 2019).

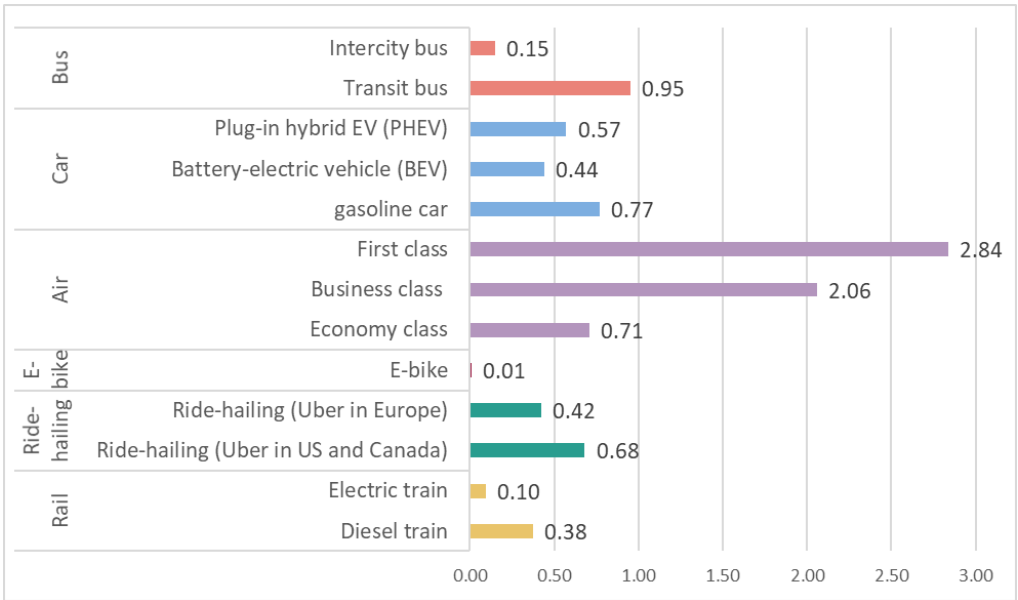


Figure 2. CO₂ emissions (lbs) per passenger-mile traveled (PMT)

3. SITING AND SIZING CHARGING INFRASTRUCTURE

Figure 3 shows a typical workflow for siting and sizing charging infrastructures, widely used in recent literature. Infrastructure planning involves integrating multi-dimensional inputs, including spatial data (e.g., land use patterns, road networks, points of interest), socio-economic factors (e.g., EV adoption rates and household data), and energy system parameters (e.g., power supply information). These inputs shape key constraints like candidate site locations, land use regulations, budget limits, service levels (e.g., queuing length and wait time), and grid capacity. Planners typically aim to minimize total development and operation costs while maximizing operator benefits, enhancing service efficiency and quality, and improving environmental outcomes. Optimization is achieved through heuristic or analytical methods (e.g., genetic algorithms, GIS-based modeling, or multi-criteria decision analysis), yielding EVCS locations and their outfitted plugs, cost estimations, and performance metrics.

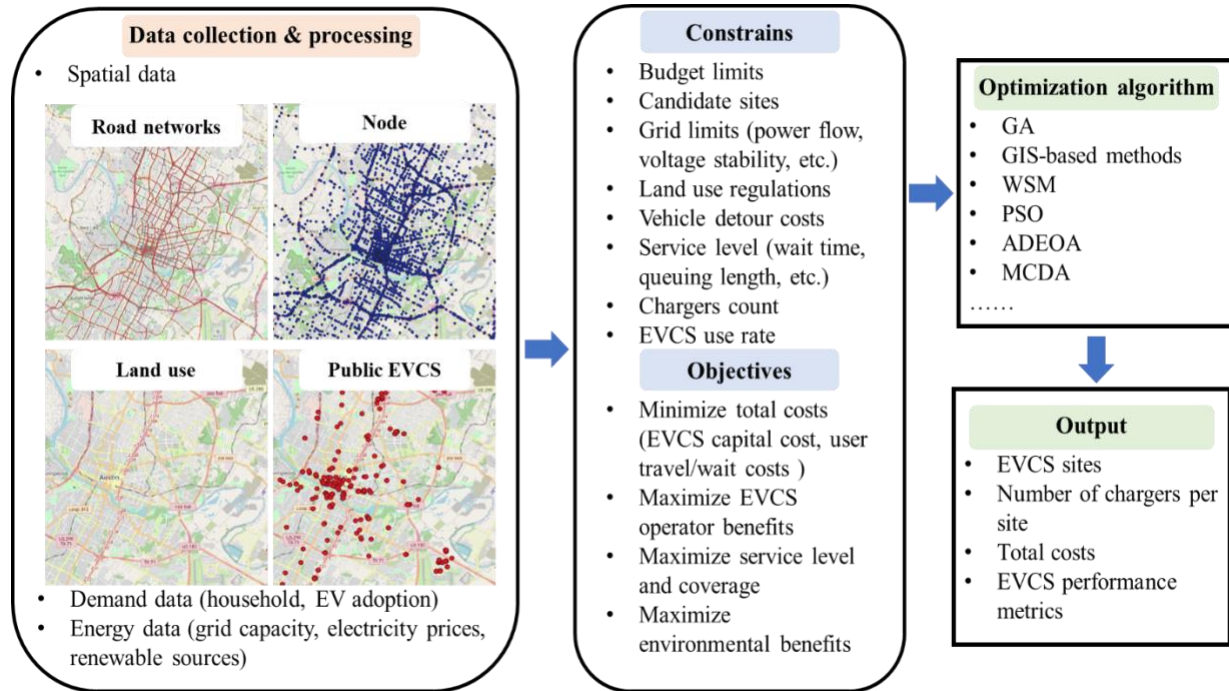


Figure 3. EV Charging Station (EVCS) siting and sizing optimization flowchart

This generalized workflow is adaptable to various strategic siting approaches as summarized in Table 1. Expanding EV charging access by sharing chargers at electric bus (e-Bus) depots, households, and multi-unit dwellings (MUDs) can enhance charger use, reduce reliance and congestion at public EVCS, and bridge residential charging gaps. Co-location strategies, including integration with streetlights, public EVCS, parking lots adjacent to shopping and workplaces, and gas stations, can lower deployment cost, increase convenience, and promote efficient land use. Highway fast-charging corridors further support long-distance travel. Each strategy brings distinct benefits, collectively fostering a more accessible and user-friendly charging ecosystem.

Table 1. EV Charging Station (EVCS) siting strategies

Strategic approaches	Place	Description	Benefits	References
Shared charger access	e-Bus depots	Opening e-Bus depots and chargers to the public to maximize use	<ul style="list-style-type: none"> • No disruption to e-bus operations. • Extra revenue for e-bus operators. • Meet >97% of private EVs' charging demand. 	• Jia et al. (2024)

	Household	Encourage households to open and share their private chargers to the public	<ul style="list-style-type: none"> • Increase parking events with charging access. • Reduce private EV users' reliance on public EVCS. • Complementary role with the public fast-charging EVCS. • Raise resident concerns regarding unauthorized vehicles in communities and safety risks. 	<ul style="list-style-type: none"> • Yang et al. (2024) • Shi et al. (2025)
	Multi-unit/multi-family dwellings (MUDs)	Introduce community charging hubs in parking lots with shared chargers to address home-charging barriers for residents	<ul style="list-style-type: none"> • Faster charging hub turnover with compact schedule. • Bridge the charging supply gap. 	<ul style="list-style-type: none"> • Zhang et al. (2023)
Co-location with existing infrastructure	Streetlight	Integrate chargers with streetlights to reduce installation costs and use existing grid connections in urban areas where space is limited	<ul style="list-style-type: none"> • Expand charging access for residents without private parking. • Require solutions for power supply limitations. 	<ul style="list-style-type: none"> • U.S. DOE (2024)
	Public EVCS	Co-locate fleet-owned charging stations with existing public EVCS to achieve cost-sharing during construction and cord-sharing during use	<ul style="list-style-type: none"> • Enable more simultaneous charges and reduce charging congestion at public EVCS. • Minimize charging delays for both private EVs and EV fleets. • Avoid duplicate infrastructure (save huge investment costs). 	<ul style="list-style-type: none"> • Su & Kockelman. (2024) • Su et al. (2025)
	Parking lot	Install chargers in commercial/public parking lots to serve drivers while they park	<ul style="list-style-type: none"> • Optimize revenue while enhancing customer convenience. • Increase property value and attract potential investors. 	<ul style="list-style-type: none"> • Yu et al. (2025)
	gas station	Integrate EV chargers with the gas station to use the existing public infrastructure	<ul style="list-style-type: none"> • Use high-traffic locations and existing amenities (e.g., quick-service stores, restrooms). • Align existing consumers' refueling habits. • Balance the decline of gas station services while ensuring efficient use of public infrastructure. 	<ul style="list-style-type: none"> • Cai et al. (2014) • Driivz (2025)
	Workplace	Deploy chargers at the workplace to support employee EV adoption and daytime charging demand	<ul style="list-style-type: none"> • Building energy savings (e.g., daylighting control) can facilitate EV charging alongside office building loads. • Supports employees, especially renters, by providing daytime charging when renewable energy is sufficient. • Alleviate range anxiety, making EV adoption more practical. 	<ul style="list-style-type: none"> • Liu et al. (2024) • Tejasw (2024)
Long-distance and mobility hub charging	Highway Fast-Charging Corridors	Deploy DC fast chargers along major travel corridors	<ul style="list-style-type: none"> • Ensure a seamless long-distance travel experience for EV drivers. • Establish a convenient and reliable national EV charging network for all drivers. 	<ul style="list-style-type: none"> • Great Plains Institute (2023)

- Minimize recharge downtime and help save travel time.

Charging infrastructure siting methods are typically categorized into node-based, path-based, and tour-based approaches (Li et al., 2024; Speth et al., 2025). Node-based models are the most widely used, placing stations at candidate sites to serve demand at network nodes. Commonly applied methods include the set covering location model (SCLM), maximum covering location model (MCLM), and p-median model. For instance, Zeng et al. (2019) applied the p-median model to minimize average distance between demand points and the nearest station, while Alshehhi et al. (2025) integrated SCLM, MCLM, and the flow intercept location model (FILM) to optimize station placement along the United Arab Emirates (UAE) highways for maximum coverage with minimal infrastructure. The second is path-based models, which locate stations along high-flow routes using origin-destination (OD) data rather than node demand. Hodgson (1990) introduced the flow capturing location model (FCLM) to capture the maximum flow between OD pairs, later extended by Kuby and Lim (2005) into the flow refueling location model (FRLM) to account for multiple charging stops. The tour-based models rely on the user behavior data, such as vehicle routes and waiting times; for example, Whitehead et al. (2021) used truck trip GPS data from southeast Queensland with MCLM to site charging stations for a short-haul electric truck fleet. However, tour-based approaches are often challenging to scale for nationwide infrastructure planning due to data availability and privacy concerns (Speth et al., 2025). Additional studies on facility location are summarized in Table 2. The optimization phase typically involves multi-objective functions, aiming to minimize costs (e.g., infrastructure, detour, waiting) while maximizing coverage and benefits, as demonstrated by studies using methods like genetic algorithm (GA) (Xiao et al., 2020; Zhou et al., 2022), weighted-sum method (WSM) (Gönül et al., 2024), particle swarm optimization (PSO) (Zhang et al., 2019), and multi-criteria decision analysis (MCDA) (Skaloumpakas et al., 2022).

Table 2. Modeling approaches for EVCS siting and sizing in recent studies

Candidate sites	Objective	Constraints considered	Method	References
Yes	Maximize the weighted sum of the EVCS siting selection criteria	<ul style="list-style-type: none"> • Distance between two EVCS 	WSM	Gönül et al. (2024)
Yes	Minimize upper-level cost (infrastructure, distance and queueing waiting costs)	<ul style="list-style-type: none"> • Finite queue length • Charging detour distance 	GA	Xiao et al. (2020)
No	Place EVCS to the road segment with top ranked utility	<ul style="list-style-type: none"> • Available EV range • Installation preferences 	MCDA	Skaloumpakas et al. (2022)
No	Maximize EVCS benefits, minimize voltage deviation rate, users' wait time, and detour costs	<ul style="list-style-type: none"> • System power flow • Node voltage amplitude • Service radius • Charging queueing time • Number of EVSEs in each EVCS • EV user charging requirement 	Adaptive differential evolution optimization algorithm (ADEOA)	Jin et al. (2023)
Yes	Minimize the costs (capital expenditure + charging costs) and maximize the coverage	<ul style="list-style-type: none"> • Demand • Distance between the charging station • Number of facilities in each charging station 	GIS-based multi-objective PSO	Zhang et al. (2019)
No	Minimize the average distance between charging demand points and the nearest station	<ul style="list-style-type: none"> • Station capacity • reachability 	K-means and hierarchical clustering algorithm	Zeng et al. (2019)

No	Minimize total building cost, charging cost, and environmental costs	<ul style="list-style-type: none"> • Charging demand and power supply • Charging detour distance • Charging station use 	Genetic algorithms (GA)	Zhou et al. (2022)
----	--	--	-------------------------	--------------------

4. IMPACTS OF SMART-CHARGING STRATEGIES ON GRID AND EMISSIONS

Transportation systems and energy networks are deeply interconnected, with each influencing the other's efficiency, sustainability, and resilience. As the transportation sector increasingly shifts toward electrification, its reliance on energy systems grows. Meanwhile, EVs can serve as flexible energy storage units through technologies like smart-charging to support grid stability. The integration of diverse renewable energy resources, such as solar and wind, enhances grid flexibility, making the cooperation between transportation and energy important for sustainable development.

EVs typically operate under three charging modes: disorderly charging (V0G), unidirectional orderly charging (V1G), and bidirectional charging and discharging (V2G) (Li et al., 2025). V0G is commonly seen in residential settings, where users plug in their EV immediately upon backing home, potentially causing grid demand spikes. V1G introduces smart scheduling (e.g., shift charging to off-peak periods when renewable energy is abundant), while V2G allows EVs to feed energy back to the grid during peak demand or power shortages. In a typical residential community with 100 EVs per 1000 people, disorderly charging can increase the peak load by 17.1%, whereas vehicle-grid-integration (VGI), even with a participation ratio of 30%, significantly reduces the load range by 74.8% (Li et al., 2025). Aligning these smart-charging strategies with renewable resource generation is important to reduce carbon emissions and achieve less unsustainable energy management. For instance, Casallas et al. (2024) applied the EVI-Pro Lite model to project EV charger requirements in Texas, showing how solar photovoltaics (PV) and wind turbines (WT) can meet the energy demands of EV charging infrastructure, achieving net-zero energy performance. Yang et al. (2024) found that V2G encourages EVs to charge during low-price periods and discharge during high-price periods, thereby mitigating electricity price fluctuations. This mode can substitute 22.2% to 30.1% of energy storage and accelerate the phase-out of coal-fired power. However, V2G becomes attractive only when the renewable energy penetration rate reaches 80%, and it notably reduces the peak net load during the early morning and night while increasing the valley load at night. Increasing the fast-charging infrastructure development will further strengthen these benefits.

The environmental and economic advantages of V2G are substantial. Liao et al. (2021) highlighted that SAEV fleets, particularly those with larger battery capacities, can save up to 35.8% in GHG emissions and 41.4% in energy consumption compared to traditional AV fleets. Providing V2G service with a 75-kWh battery can save an average of 66.5 tons of GHG emissions per vehicle annually, while a 25-kWh battery can reduce energy use by 46.8%. Prior study also shows that SAEV fleets could reduce charging costs by at least 10% and emissions by at least 16% (Gurumurthy, K.M. et al., 2022).

Economically, V2G revenue can reach \$2,272 per SAEV annually (Liao et al., 2021). Dean et al. (2023) further illustrated the potential of SAEVs to reduce peak electricity demand and emissions. They proposed a multi-stage optimization approach that integrated day-ahead charging schedules with real-time vehicle dispatch decisions. This integration allows fleet operators to align vehicle charging and discharging activities with fluctuating electricity prices and grid emissions. Simulation results showed that price-agnostic charging strategies could add 29.6 MW (1.05% of peak demand) to the grid. In contrast, a multi-stage charging and discharging framework reduced peak demand by 38%, avoiding the daily release of up to 904 tons of CO₂, with an average reduction of 654 tons per day. Noori et al. (2016) also modeled and plotted the revenues of V2G technology for five ISO/RTO regions, and predicted that by 2030, if 1% of EVs in these regions provide V2G services, cumulative CO₂ emissions reductions can achieve 500,000 tons, with average net revenue ranging from 25,000 to 28,000 per vehicle.

Yu et al. (2024) used real trajectory data with 19,900 electric taxis (ETs) in Shenzhen, China, for V2G potential and resilience analysis. The ET-V2G system can supply at least 50 MW for 1 h, 30 MW for 2 h,

and 20 MW for 3 h during peak periods while simultaneously recovering within 2 to 3 h without disrupting the regular operations of ETs. This highlights the potential of V2G to enhance grid resilience and support renewable energy integration. Overall, the growing interdependencies between transportation and energy systems underscore the important role of EVs and smart-charging strategies. While their benefits are widely recognized, implementation remains hindered by technical limitations and regulatory challenges.

5. FUTURE RESEARCH DIRECTIONS

The rapid electrification of transportation and its integration with power grids present numerous opportunities for innovation, yet several research gaps remain. Addressing these gaps could enhance grid resilience, optimize infrastructure deployment, and maximize environmental benefits. This section outlines promising directions for future work.

5.1 Integrate Infrastructure Planning and Dynamic Fleet Sizing

Recent studies often treat fleet size as an exogenous variable, relying on empirical data or assumptions rather than dynamic system interactions. Future work could integrate system dynamics (SD) models with simulation frameworks to endogenously estimate fleet sizes in response to socio-economic trends, travel pattern changes, and charging behavior shifts. The feedback loop between fleet simulation and infrastructure planning could iteratively adjust fleet size and charging requirements until system convergence is achieved. This approach would provide insights into optimal fleet configurations, cost-effective infrastructure settings, and long-term system equilibrium under varying policy and behavioral scenarios.

5.2 Behavioral Shifts and Environmental Trade-offs in Emerging Mobility Systems

The rise of SAVs and SAEVs may trigger significant changes in travel behavior, including mode and charging patterns shifts, and increased vehicle-miles traveled (VMT). However, studies examining the behavioral and environmental implications of these changes remain limited. Future research should explore the interplay between user preferences, travel and charging patterns, and mode shifts, particularly under mixed conditions involving human-driven, electric, and autonomous vehicles. For example, incorporate activity-based travel demand models with life-cycle assessments (LCAs) to evaluate how SAEV adoption influences emissions, energy consumption, and charging infrastructure needs under different adoption scenarios.

5.3 Optimal Charger Mix Considers Charging Behavior

While DCFC is essential for efficient fleet operations and long-distance travel, high costs may deter private EV owners from frequent use. Conversely, Level 2 charging is more economical but may not meet fleet efficiency requirements (e.g., lower charging downtime) to remain competitive in the ride-hailing market. Future research should assess how tailored ratios of Level 2 to DCFC chargers, especially at shared charging facilities, considering fleet charging schedules, private EV user preferences and willingness to pay, and grid impact and infrastructure costs. Multi-objective optimization framework could balance cost, user satisfaction, and grid stability while determining the ideal charger mix.

5.4 Integrated Planning of Power Grid and Charging Infrastructure

Many existing studies on EVCS planning lack detailed grid constraints, and they assume that grid upgrades are easily achieved. Similarly, power system models often overlook practical EVCS demand predictions and urban spatial limitations. An integrated planning approach is needed that jointly considers fleet and private EV charging demand, grid hosting capacity, and siting and sizing charging infrastructure. Such co-planning would ensure that charging infrastructure expansion aligns with grid modernization efforts to enhance deployment feasibility and grid resilience.

5.5 Smart Operational Strategies for EV-grid

While day-ahead charging and discharging strategies have shown promise in aligning EV behavior with electricity markets, real-time operational models for EV-grid integration remain underdeveloped. A promising direction lies in developing real-time decision-support tools that dynamically respond to grid emissions, electricity price fluctuations, and renewable energy availability. Incorporating short-term forecasts of renewable generation, traffic conditions, and grid contingencies (e.g., outages or congestion) can significantly enhance the resilience and effectiveness of EV fleet operations, enabling them to provide more responsive and robust grid support services.

5.6 SAEVs' Penetration within Ride-hailing Fleets

Conventional vehicles, SAVs, and SAEVs offer distinct advantages in meeting ride-hailing demand. Conventional vehicles and SAVs, often powered by ICE or hybrid systems, alleviate concerns about range limitations and are well-suited for long-distance trips. In contrast, SAEVs lower emissions and operational costs while enabling integration with grid services. SAEVs can also be optimized for scheduled charging and energy market participation, potentially offsetting charging downtime with revenue-generating grid services.

The penetration rate of SAEVs, defined as the proportion of these vehicles within the total ride-hailing fleet, is an important factor influencing the fleet operation. High SAEV penetration may bring environmental benefits and cost savings, but also intensifies demand for charging infrastructure and grid power. Conversely, lower penetration levels may reduce these challenges but limit system-wide benefits. Future research should optimize fleet compositions by balancing SAEV sustainability benefits against ICE vehicles' flexibility under varying service demand patterns, grid constraints, and technology adoption scenarios to assess their implications on fleet efficiency, cost, and performance.

6. CONCLUSIONS

This paper synthesizes recent advances and ongoing challenges associated with EVs, from the adoption trend to charging infrastructure planning and smart-grid integration, while identifying key research gaps for future investigation. Recent studies show that ride-hailing fleets composed of autonomous and all-electric vehicles (or SAEVs) further amplify EVs' benefits, reducing cumulative energy use and emissions by 60%.

Smart-charging strategies present huge potential in enhancing these gains. SAEV fleets with V2G capabilities can achieve 36% reductions in GHG emissions and 41% in energy use compared to the conventional fleet, and optimized charging schedules can further mitigate grid peak demand by 38%. However, V2G's attractiveness depends on high renewable energy penetration ($\geq 80\%$), highlighting the need for improving grid-transportation coordination. This work sorts optimization approaches for siting and sizing of EVCS, along with strategic planning methods, which are important to scale EV adoption cost-effectively.

Integrating these strategies with dynamic fleet operations and real-time market conditions remains challenge. The future research directions outlined in this paper, ranging from optimal charger mix and behavioral modeling to integrated infrastructure planning with the grid, highlight the need for solutions that span transportation planning, power grid, and data-driven optimization.

Overall, achieving a sustainable and resilient EV system will require coordinated planning efforts across sectors and scales. Aligning transportation electrification with renewable energy supply, technological evolution, and grid upgrade could unlock environmental benefits while enhancing mobility services in both urban and regional contexts.

7. AUTHOR STATEMENT

Lin Su: Writing – Original draft, resources, conceptualization. **Kara M. Kockelman:** Writing – Review & editing, Supervision, Funding acquisition, Conceptualization.

8. REFERENCES

- Alshehhi, H., Corona, B. H., Zaiter, I., Mezher, T., & Mayyas, A. (2025). Strategic placement of alternative fueling stations in the UAE. *Scientific Reports*, 15(1), 11699.
- Bitencourt, L., Dias, B., Soares, T., Borba, B., Quirós-Tortós, J., & Costa, V. (2023). Understanding business models for the adoption of electric vehicles and charging stations: Challenges and opportunities in Brazil. *IEEE Access*, 11, 63149-63166.
- Bosch eBike. (2025). Sustainable mobility with the eBike. Available at: <https://www.bosch-ebike.com/us/sustainability>
- Cai, H., Jia, X., Chiu, A. S., Hu, X., & Xu, M. (2014). Siting public electric vehicle charging stations in Beijing using big-data informed travel patterns of the taxi fleet. *Transportation Research Part D: Transport and Environment*, 33, 39-46.
- Casallas, V. M., Saha, J., Abbasi, A., Jin, T., & Londa, M. (2024). Planning for Net-Zero Electric Vehicle Charging Infrastructure in Texas through 2040. In *IIEE Annual Conference. Proceedings (pp. 1-6)*. Institute of Industrial and Systems Engineers (IIEE).
- Chen, T. D., Kockelman, K. M., & Hanna, J. P. (2016). Operations of a shared, autonomous, electric vehicle fleet: Implications of vehicle & charging infrastructure decisions. *Transportation Research Part A: Policy and Practice*, 94, 243-254.
- Coffman, M., Bernstein, P., & Wee, S. (2015). Factors affecting EV adoption: A literature review and EV forecast for Hawaii. *Electric Vehicle Transportation Center* (April 2015), 1-36.
- Congressional Budget Office. (2022). Emissions of Carbon Dioxide in the Transportation Sector. US CBO. Available at: <https://www.cbo.gov/publication/58861>.
- Dahiwalé, P. V., Rather, Z. H., & Mitra, I. (2024). A comprehensive review of smart charging strategies for electric vehicles and way forward. *IEEE Transactions on Intelligent Transportation Systems*.
- Dean, M. D., de Souza, F., Gurumurthy, K. M., & Kockelman, K. (2023). Multi-stage charging and discharging of electric vehicle fleets. *Transportation Research Part D: Transport and Environment*, 118, 103691.
- Donald, J., Grubbs, S. (2024). The future of Texas power. Available at: <https://comptroller.texas.gov/economy/fiscal-notes/industry/2024/energy-demand/#:~:text=Riot%20Platforms%20Rockdale%20Bitcoin%20mining,account%20for%20in%20real%20time>.
- Driivz. (2025). Retailers Can Lead in Meeting EV Charging Infrastructure Demands. *Driivz*. Available at: <https://driivz.com/blog/how-u-s-convenience-and-fuel-retailers-can-lead-in-meeting-ev-charging-infrastructure-demands/>
- Fagnant, D. J. (2014). The future of fully automated vehicles: opportunities for vehicle-and ride-sharing, with cost and emissions savings (Doctoral dissertation).
- Future Tracker. (2023). Flight Class and Its Impact on Your Carbon Footprint. Available at: <https://www.futuretracker.com/post/flight-class-and-its-impact-on-your-carbon-footprint>
- Gawron, J. H., Keoleian, G. A., De Kleine, R. D., Wallington, T. J., & Kim, H. C. (2019). Deep decarbonization from electrified autonomous taxi fleets: Life cycle assessment and case study in Austin, TX. *Transportation Research Part D: Transport and Environment*, 73, 130-141.
- Gurumurthy, K. M., Dean, M. D., & Kockelman, K. M. (2022). Sensitivity of Charging and Maintenance Trips of Shared Fully-Automated Electric Vehicle Fleets in a Large-Scale Model. In *Annual Meeting of the Southern Regional Science Association*.

- Gönül, Ö., Duman, A. C., & Güler, Ö. (2024). A comprehensive framework for electric vehicle charging station siting along highways using weighted sum method. *Renewable and Sustainable Energy Reviews*, 199, 114455.
- Great Plains Institute. (2023). United States EV Fast-Charging Corridor Road Map. Available at: https://betterenergy.org/wp-content/uploads/2023/01/EV_CorridorRoadmap2023.pdf
- Guo, Y., Souders, D., Labi, S., Peeta, S., Benedyk, I., & Li, Y. (2021). Paving the way for autonomous Vehicles: Understanding autonomous vehicle adoption and vehicle fuel choice under user heterogeneity. *Transportation Research Part A: Policy and Practice*, 154, 364-398.
- Heineke, K., Kloss, B., Ruden, A. M., Müller, T., & Wiemuth, C. (2023). Shared mobility: Sustainable cities, shared destinies. *McKinsey & Company*. Available at: <https://www.mckinsey.com/industries/automotive-and-assembly/our-insights/shared-mobility-sustainable-cities-shared-destinies>
- Hodgson, M. J. (1990). A flow-capturing location-allocation model. *Geographical analysis*, 22(3), 270-279.
- Huang, X., Lin, Y., Liu, F., Lim, M. K., & Li, L. (2022). Battery recycling policies for boosting electric vehicle adoption: evidence from a choice experimental survey. *Clean Technologies and Environmental Policy*, 24(8), 2607-2620.
- International Energy Agency (IEA). (2021). Comparative life-cycle greenhouse gas emissions of a mid-size BEV and ICE vehicle. Available at: <https://www.iea.org/data-and-statistics/charts/comparative-life-cycle-greenhouse-gas-emissions-of-a-mid-size-bev-and-ice-vehicle>
- International Energy Agency (IEA). (2024). Trends in electric cars. Available at: <https://www.iea.org/reports/global-ev-outlook-2024/trends-in-electric-cars>
- Jia, Z., An, K., & Ma, W. (2024). Utilizing electric bus depots for public Charging: Operation strategies and benefit analysis. *Transportation Research Part D: Transport and Environment*, 130, 104155.
- Jin, Y., Acquah, M. A., Seo, M., & Han, S. (2023). Optimal siting and sizing of EV charging station using stochastic power flow analysis for voltage stability. *IEEE Transactions on Transportation Electrification*, 10(1), 777-794.
- Jones, E. C., & Leibowicz, B. D. (2019). Contributions of shared autonomous vehicles to climate change mitigation. *Transportation Research Part D: Transport and Environment*, 72, 279-298.
- Kinder Institute for Urban Research. (2019). Austin among global cities where carbon emissions are already falling. Rice University. Available at: <https://kinder.rice.edu/urbanedge/austin-among-global-cities-where-carbon-emissions-are-already-falling>
- Kuby, M., & Lim, S. (2005). The flow-refueling location problem for alternative-fuel vehicles. *Socio-Economic Planning Sciences*, 39(2), 125-145.
- Li, J., Chew, A., & Wang, H. (2024). Investigating state-of-the-art planning strategies for electric vehicle charging infrastructures in coupled transport and power networks: A comprehensive review. *Progress in Energy*.
- Li, Y., Wang, K., Xu, C., Wu, Y., Li, L., Zheng, Y., ... & Ouyang, M. (2025). The potentials of vehicle-grid integration on peak shaving of a community considering random behavior of aggregated vehicles. *Next Energy*, 7, 100233.
- Liao, Z., Taiebat, M., & Xu, M. (2021). Shared autonomous electric vehicle fleets with vehicle-to-grid capability: Economic viability and environmental co-benefits. *Applied Energy*, 302, 117500.

- 1 Liu, S., Vlachokostas, A., Si, C., & Kontou, E. (2024). Coupled management of electric vehicle
2 workplace charging and office building loads. *Transportation Research Part D: Transport and*
3 *Environment*, 134, 104317.
- 4 Loeb, B., & Kockelman, K. (2019). Fleet performance and cost evaluation of a shared autonomous
5 electric vehicle (SAEV) fleet: A case study for Austin, Texas. *Transportation Research Part A: Policy*
6 *and Practice*, 121, 374-385.
- 7 Loeb, B., Kockelman, K., & Liu, J. (2018). Shared autonomous electric vehicle (SAEV) operations across
8 the Austin, Texas network with charging infrastructure decisions. *Transportation Research Part C:*
9 *Emerging Technologies*, 89, 222-233.
- 10 Lyft. (2020). Leading the Transition to Zero Emissions: Our Commitment to 100% Electric Vehicles by
11 2030. Available at: <https://www.lyft.com/blog/posts/leading-the-transition-to-zero-emissions>
- 12 Maguire, G. (2025). Texas tops US states for renewable energy and battery capacity. Reuters. Available
13 at: [https://www.reuters.com/business/energy/texas-tops-us-states-renewable-energy-battery-capacity-](https://www.reuters.com/business/energy/texas-tops-us-states-renewable-energy-battery-capacity-maguire-2025-01-09/)
14 [maguire-2025-01-09/](https://www.reuters.com/business/energy/texas-tops-us-states-renewable-energy-battery-capacity-maguire-2025-01-09/)
- 15 Martinez, L. M., Pritchard, J. P., & Crist, P. (2024). Shared Mobility's Role in Sustainable Mobility: Past,
16 Present, and Future. *Annual Review of Environment and Resources*, 49.
- 17 MIT Climate Portal. (2022). Are electric vehicles definitely better for the climate than gas-powered cars?
18 Available at: [https://climate.mit.edu/ask-mit/are-electric-vehicles-definitely-better-climate-gas-powered-](https://climate.mit.edu/ask-mit/are-electric-vehicles-definitely-better-climate-gas-powered-cars)
19 [cars](https://climate.mit.edu/ask-mit/are-electric-vehicles-definitely-better-climate-gas-powered-cars)
- 20 National Rail. (2023). Emissions Comparison Project Methodology. Available at:
21 [https://assets.nationalrail.co.uk/e8xgegruud3g/2190fKUEtatQoCjOJLPFMR/fa2b40bc94b7bf4504b8f955](https://assets.nationalrail.co.uk/e8xgegruud3g/2190fKUEtatQoCjOJLPFMR/fa2b40bc94b7bf4504b8f9555772844a/Campaign_for_Better_Transport_Emissions_Comparison_Project_Methodology.pdf)
22 [5772844a/Campaign_for_Better_Transport_Emissions_Comparison_Project_Methodology.pdf](https://assets.nationalrail.co.uk/e8xgegruud3g/2190fKUEtatQoCjOJLPFMR/fa2b40bc94b7bf4504b8f9555772844a/Campaign_for_Better_Transport_Emissions_Comparison_Project_Methodology.pdf)
- 23 Noori, M., Zhao, Y., Onat, N. C., Gardner, S., & Tatari, O. (2016). Light-duty electric vehicles to
24 improve the integrity of the electricity grid through Vehicle-to-Grid technology: Analysis of regional net
25 revenue and emissions savings. *Applied Energy*, 168, 146-158.
- 26 Nichols, B. G., Kockelman, K. M., & Reiter, M. (2015). Air quality impacts of electric vehicle adoption
27 in Texas. *Transportation Research Part D: Transport and Environment*, 34, 208-218.
- 28 Powell, S., Cezar, G. V., Min, L., Azevedo, I. M., & Rajagopal, R. (2022). Charging infrastructure access
29 and operation to reduce the grid impacts of deep electric vehicle adoption. *Nature Energy*, 7(10), 932-
30 945.
- 31 Power Up Texas. (2025). Supporting renewable energy in Texas. Available at:
32 [https://poweruptexas.org/#:~:text=According%20to%20the%20E.I.A.%2C%20Texas,%2C%20General%](https://poweruptexas.org/#:~:text=According%20to%20the%20E.I.A.%2C%20Texas,%2C%20General%20Motors%2C%20and%20more)
33 [20Motors%2C%20and%20more](https://poweruptexas.org/#:~:text=According%20to%20the%20E.I.A.%2C%20Texas,%2C%20General%20Motors%2C%20and%20more).
- 34 Qadir, S. A., Ahmad, F., Al-Wahedi, A. M. A., Iqbal, A., & Ali, A. (2024). Navigating the complex
35 realities of electric vehicle adoption: A comprehensive study of government strategies, policies, and
36 incentives. *Energy Strategy Reviews*, 53, 101379.
- 37 Ramachandramurthy, V. K., Ajmal, A. M., Kasinathan, P., Tan, K. M., Yong, J. Y., & Vinoth, R.
38 (2023). Social acceptance and preference of EV users—a review. *IEEE Access*, 11, 11956-11972.
- 39 Sambasivam, B., Bhaskar, A., Kockelman, K. M., & Leibowicz, B. (2023). Economic and Environmental
40 Impacts of EV Smart Charging Programs on the US Power Sector. Presented at the 5th Bridging
41 *Transportation Researchers conference*. Available at:
42 https://www.caee.utexas.edu/prof/kockelman/public_html/TRB24EVCharging.pdf
- 43 Shaheen, S., & Bouzaghane, M. A. (2019). Mobility and energy impacts of shared automated vehicles: A
44 review of recent literature. *Current sustainable/renewable energy reports*, 6, 193-200.

1 Sheppard, C. J., Jenn, A. T., Greenblatt, J. B., Bauer, G. S., & Gerke, B. F. (2021). Private versus shared,
2 automated electric vehicles for US personal mobility: Energy use, greenhouse gas emissions, grid
3 integration, and cost impacts. *Environmental science & technology*, 55(5), 3229-3239.

4 Shehabi, A., Hubbard, A., Newkirk, A., Lei, N., Siddik, M. A. B., Holecek, B., ... & Sartor, D. (2024).
5 2024 United States Data Center Energy Usage Report.

6 Shi, L., Guo, M., Lyu, X., & Li, S. (2025). Promoting community resident support for private charging
7 pile sharing: A micro survey. *Transportation Research Part D: Transport and Environment*, 142, 104675.

8 Shirley, C., & Gecan, R. (2022). Emissions of carbon dioxide in the transportation sector. Available at:
9 <https://trid.trb.org/View/2094353>

10 Skaloumpakas, P., Spiliotis, E., Sarmas, E., Lekidis, A., Stravodimos, G., Sarigiannis, D., ... & Psarras, J.
11 (2022). A multi-criteria approach for optimizing the placement of electric vehicle charging stations in
12 highways. *Energies*, 15(24), 9445.

13 Sperling, D. (2018). *THREE REVOLUTIONS: STEERING AUTOMATED, SHARED, AND ELECTRIC*
14 *VEHICLES TO A BETTER FUTURE*. Island Press.

15 Speth, D., Plötz, P., & Wietschel, M. (2025). An optimal capacity-constrained fast charging network for
16 battery electric trucks in Germany. *Transportation Research Part A: Policy and Practice*, 193, 104383.

17 Su, L., & Kockelman, K. M. (2024). Shared EV charging stations for the Austin area: opportunities for
18 public-private partnerships. *Transportation Planning and Technology*, 47(8), 1314-1330.

19 Su, L., Gurumurthy, K. M., & Kockelman, K. M. (2025). Siting and sizing of public-private charging
20 stations impacts on household and electric vehicle fleets. *Transportation Research Part A: Policy and*
21 *Practice*, 195, 104436.

22 Subashini, M., & Vijayan, S. (2023). Smart charging for zero emission vehicles—a comprehensive review.
23 *Renewable Energy Focus*, 46, 57-67.

24 Tamor, M. A., & Stechel, E. B. (2022). Electrification of transportation means a lot more than a lot more
25 electric vehicles. *IScience*, 25(6).

26 Tejaswi, V. (2024). Electric vehicle charging behavior: An analysis of workplace charging heterogeneity
27 to improve charging network planning. Available at: <https://escholarship.org/uc/item/7kp2w0c1>

28 U.S. Department of Energy (DOE). (2024). Building Community Relationships Through Streetlight EV
29 Charging in Kansas City. Alternative Fuels Data Center (AFDC). Available at:
30 <https://afdc.energy.gov/case/3134>

31 U.S. Department of Energy (DOE). (2025). All-Electric Vehicle. Available at:
32 <https://www.fueleconomy.gov/feg/evtech.shtml>

33 U.S. Energy Information Administration (EIA). (2024a). U.S. energy consumption by source and sector,
34 2023. Available at: [https://www.eia.gov/energyexplained/us-energy-facts/images/consumption-by-source-](https://www.eia.gov/energyexplained/us-energy-facts/images/consumption-by-source-and-sector.pdf)
35 [and-sector.pdf](https://www.eia.gov/energyexplained/us-energy-facts/images/consumption-by-source-and-sector.pdf)

36 U.S. Energy Information Administration (EIA) (2024b). Available at:
37 <https://www.eia.gov/state/?sid=TX#tabs-1>

38 U.S. Energy Information Administration (EIA) (2024c). U.S. share of electric and hybrid vehicle sales
39 increased in the second quarter of 2024. Available at:
40 <https://www.eia.gov/todayinenergy/detail.php?id=62924>

41 U.S. Environmental Protection Agency (EPA). (2025). Electric Vehicle Myths. Available at:
42 <https://www.epa.gov/greenvehicles/electric-vehicle-myths#fn-3>

1 Uber. (2024a). Sustainability. Available at:
2 [https://www.uber.com/us/en/about/sustainability/?uclid_id=212bab65-3e9d-4538-bcac-](https://www.uber.com/us/en/about/sustainability/?uclid_id=212bab65-3e9d-4538-bcac-8f115cbda4cd#green)
3 [8f115cbda4cd#green](https://www.uber.com/us/en/about/sustainability/?uclid_id=212bab65-3e9d-4538-bcac-8f115cbda4cd#green)

4 Uber. (2024b). Uber's Electrification Update. Available at:
5 <https://www.uber.com/us/en/about/reports/sustainability-report/>

6 Waymo. (2025). Ride with Waymo One on Uber in Austin and Atlanta. Available at:
7 <https://waymo.com/waymo-on-uber/>

8 Whitehead, J., Whitehead, J., Kane, M., & Zheng, Z. (2022). Exploring public charging infrastructure
9 requirements for short-haul electric trucks. *International Journal of Sustainable Transportation*, 16(9),
10 775-791.

11 Xiao, D., An, S., Cai, H., Wang, J., & Cai, H. (2020). An optimization model for electric vehicle charging
12 infrastructure planning considering queuing behavior with finite queue length. *Journal of Energy Storage*,
13 29, 101317.

14 Yang, K., Zhang, Q., Wang, G., Li, H., & McLellan, B. (2024). A new model for comprehensively
15 evaluating the economic and environmental effects of vehicle-to-grid (V2G) towards carbon neutrality.
16 *Journal of Energy Storage*, 98, 113067.

17 Yang, X., Liu, J., Zhuge, C., Wong, A. T. C., & Wang, P. (2024). Exploring the potential of sharing
18 private charging posts: A data-driven micro-simulation approach. *Sustainable Cities and Society*, 100,
19 105053.

20 Yu, G., Ye, X., Gong, D., & Xia, X. (2025). Stochastic planning for transition from shopping mall
21 parking lots to electric vehicle charging stations. *Applied Energy*, 379, 124894.

22 Yu, Q., Wang, Z., Song, Y., Shen, X., & Zhang, H. (2024). Potential and flexibility analysis of electric
23 taxi fleets V2G system based on trajectory data and agent-based modeling. *Applied Energy*, 355, 122323.

24 Zeng, M., Pan, Y., Zhang, D., Lu, Z., & Li, Y. (2019). Data-driven location selection for battery swapping
25 stations. *IEEE Access*, 7, 133760-133771.

26 Zhang, R., Horesh, N., Kontou, E., & Zhou, Y. (2023). Electric vehicle community charging hubs in
27 multi-unit dwellings: Scheduling and techno-economic assessment. *Transportation Research Part D: Transport and Environment*, 120, 103776.

28 Zhang, Y., Zhang, Q., Farnoosh, A., Chen, S., & Li, Y. (2019). GIS-based multi-objective particle swarm
29 optimization of charging stations for electric vehicles. *Energy*, 169, 844-853.

30 Zhong, S., Liu, A., Jiang, Y., Hu, S., Xiao, F., Huang, H. J., & Song, Y. (2023). Energy and
31 environmental impacts of shared autonomous vehicles under different pricing strategies. *npj Urban Sustainability*, 3(1), 8.

32 Zhou, G., Zhu, Z., & Luo, S. (2022). Location optimization of electric vehicle charging stations: Based on
33 cost model and genetic algorithm. *Energy*, 247, 123437.